




Concealed Pivot Hinges - Lift Off

22-25mm door return - weld and countersunk

Stays & Hinges

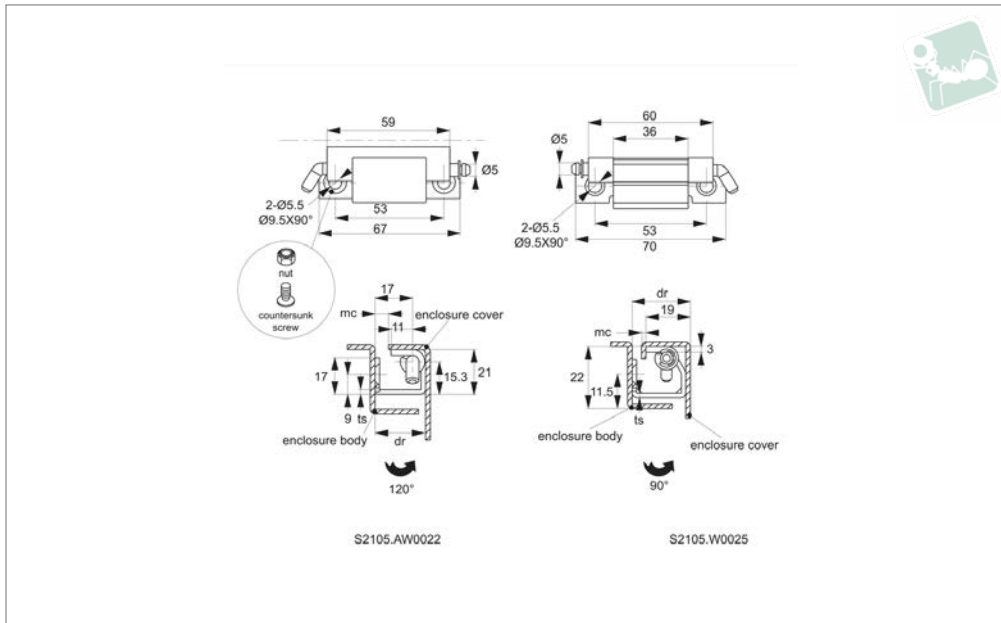

HH0700

STAYS & HINGES

Material

Body & hinge: steel, white zinc plated.

mounted via two M5 screws. Hinge plate either welded or screwed to enclosure body.

Technical Notes

Suited to sheet metal and machine enclosures with 22-25mm door return. Main body


Removable hinge pin enables easy installation and is held in place via circlip. Max. opening angle 120° or 90°.

Important Notes

dr= Maximum door return suitable for use with hinge.

mc= Minimum clearance advised between enclosure cover and body to ensure smooth, full opening of enclosure cover.

Order No.	Door return	Size	F _x N	F _y N	mc min.	ts thickness
HH0700.M0022	25	59 x 21 x 22	120	310	4.5	2.5
HH0700.M0025	22	60 x 22 x 25	120	310	4.0	2.5

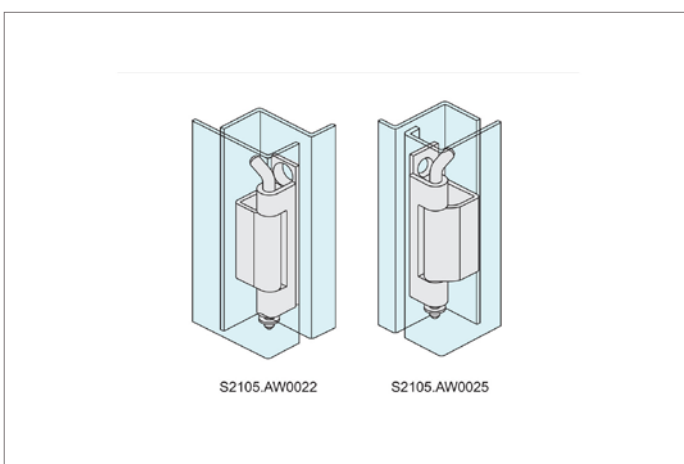




A variety of mounting methods are available!

Mounting combinations

Wixroyd concealed hinges can be mounted in a variety of ways using additional nuts and bolts.

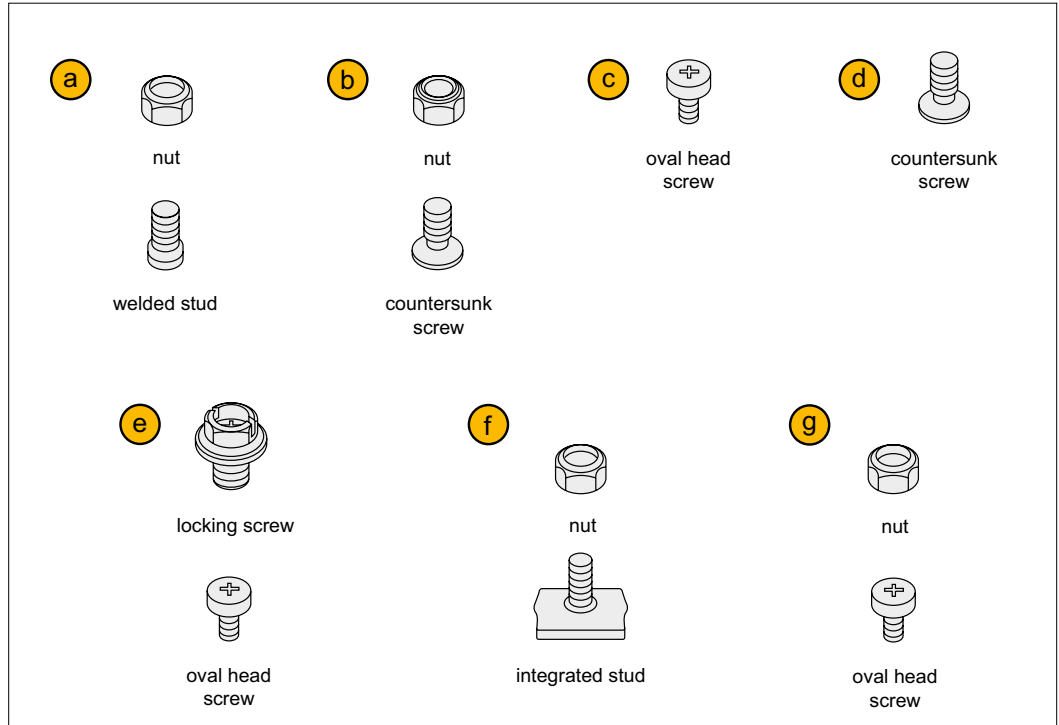

Important Note: Refer to individual product pages for suitable mounting options. If you have any problems please contact our Technical Sales Team.

Mounting example

In the example, mounting option ②, a nut with a countersunk screw, is used to mount the hinge onto the enclosure body.

