
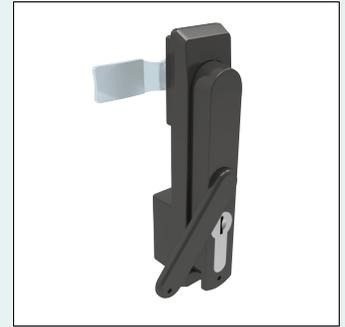


Swing Handles - Cam Control

40mm euro cylinder lock - padlockable - dust cover - zinc or

Cam Latches
& Locks

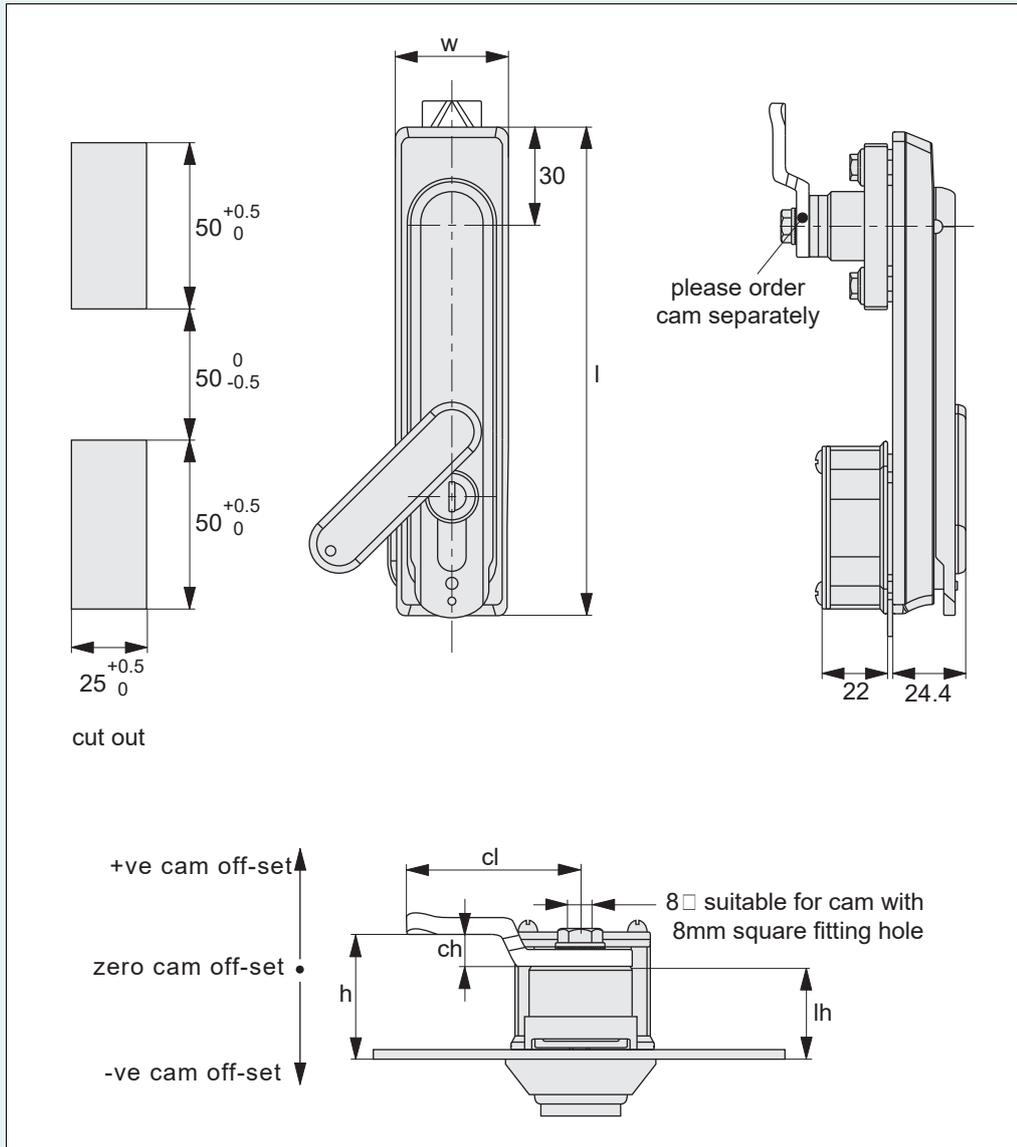

PL0100

Material

Type One: Body & Handle: die cast zinc, black powder coated.

Type Two: Body: Polyamide PA6, black. Handle: die cast zinc, black powder coated.

Cylinder lock: die cast zinc, chrome plated.

Supplied with: Keys: two per lock.

Not supplied: Cam: order separately.

Technical Notes

Order cam separately.

Cams: see suitable cam CC0020, and CC0040. Select "without projection" cam type. We recommend a 4mm thick cam for best functioning.

Dimensions ch and cl relate to cam. Use formula to calculate ch (required cam off-set), and refer to cam selection chart;

$ch = h - lh$ where;

ch = required cam off-set/height.

h = grip length (distance between inside of latch face and front of cam).

lh = body length of cam latch/lock to be used (see product table below).

Rods & Guides: to achieve 3-point latching - CC0340, CC0350, CC0355.

Tips

90° degree handle rotation combines with rod latch to open or close. All die cast metal construction provides higher strength than standard models. Ideal for electrical cabinets, telecom racks or enclosures max. panel thickness of 1 to 4mm. For use inside of cabinet gasket. Universal left/right.

Referral

Rod control model - PL0500.

Gaskets - GA0010 to GA0100.

Also available with radial pin lock, subject to min. order quantity

Order No.	Type	Body	Handle	Key Type	Padlockable	l	w	lh
PL0100.M0010	One	Zinc	Zinc	Keyed Alike	No	160	34	19
PL0100.M0020	One	Zinc	Zinc	Keyed Alike	Yes	160	34	19
PL0100.M0310	Two	Polyamide	Zinc	Keyed Alike	No	160	34	19
PL0100.M0320	Two	Polyamide	Zinc	Keyed Alike	Yes	160	34	19

