


# Aviation Pip-Pin, Standard R Handle

single acting, quick release pins - according to

## Quick Release Pins

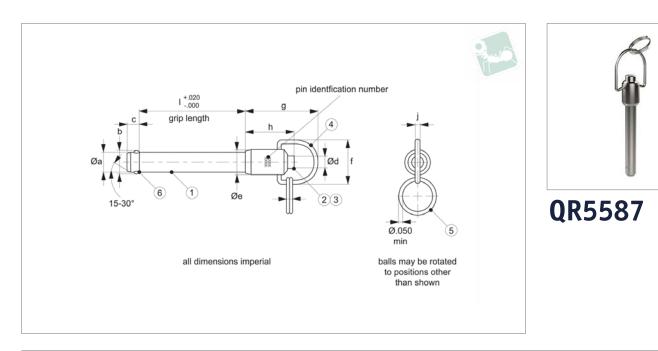

Material

#### Shank (part 1) & spindle (part 2):

CRES 17-4PH (AMS 5643), heat treated per MIL-H-6875, condition H900, min. 40 HRC, passivated per AMS2700.

#### Spring (part 3, not shown):

CRES 302 (ASTM-A-313), heat treated per MIL-H-6875, passivated per AMS2700. Handle (part 4):

CRES 302 (ASTM-A-313), passivated per AMS2700.

#### Attaching ring (part 5):

CRES 302 (ASTM-A-313), passivated per AMS2700.

#### Ball (locking element, part 6):

CRES CL440C (AMS5630), heat treated per MIL-H-6875, passivated per AMS2700.

#### **Technical Notes**

Wixroyd Aviation Pip-pins manufactured to Aviation Norm NASM 17987 (former norm: MS 17987) and tested to NAS 1332.

Manufacture certified & assessed to EN9100D by EASE (European Aerospace Supplier Evaluation). Temp. range -22°F to 302°F

Pressing = unlocking.

Releasing = locking.

Pip-pins are used for frequently repeated operations such as quick fastening, locking, adjusting, changing and securing. All dimensions shown are imperial.

#### Tips

We can manufacture specials (both metric & imperial) to your drawing, and are certified to produce to NASM standards.

Wixroyd Aviation Pip-Pins can be produced within the following dimensions:

+ diameter: from 3/16" to 1"  $\,$ 

+ grip length: from 0.3" to 9.9"

Quick production time on small batches.

Order No.	Dia. Ø	Grip I	b	С	Ød	Øe	Weight
	nom.				max.	max.	g
QR5587.A008	3/16	0.8	,594	,460	,565	0.53	24
QR5587.A009	3/16	0.9	,594	,460	,565	0.53	24
QR5587.A010	3/16	1.0	,594	,460	,565	0.53	24
QR5587.A011	3/16	1.1	,594	,460	,565	0.53	25
QR5587.A012	3/16	1.2	,594	,460	,565	0.53	25
QR5587.A015	3/16	1.5	,594	,460	,565	0.53	26
QR5587.A016	3/16	1.6	,594	,460	,565	0.53	26
QR5587.A025	3/16	2.5	,594	,460	,565	0.53	30
QR5587.B005	1/4	0.5	,594	,460	,565	0.53	24
QR5587.B006	1/4	0.6	,594	,460	,565	0.53	25
QR5587.B007	1/4	0.7	,594	,460	,565	0.53	26
QR5587.B008	1/4	0.8	,594	,460	,565	0.53	27
QR5587.B009	1/4	0.9	,594	,460	,565	0.53	27
QR5587.B010	1/4	1.0	,594	,460	,565	0.53	27
QR5587.B011	1/4	1.1	,594	,460	,565	0.53	28
QR5587.B012	1/4	1.2	,594	,460	,565	0.53	29
QR5587.B014	1/4	1.4	,594	,460	,565	0.53	30
QR5587.B015	1/4	1.5	,594	,460	,565	0.53	31
QR5587.B017	1/4	1.7	,594	,460	,565	0.53	32
QR5587.B019	1/4	1.9	,594	,460	,565	0.53	33
QR5587.B022	1/4	2.2	,594	,460	,565	0.53	36



AN ESSENTRA COMPANY

0333 207 9969

info@teknipart.co.uk

1

## Quick Release Pins

## Aviation Pip-Pin, Standard R Handle



single acting, quick release pins - according to

Order No.	Dia. Ø	Grij	o l	b	c J	Ød	Ø e Weight
	nom.				n	nax. r	max. g
QR5587.B040	1/4	4.	D,5	,4 94	.60 ,!	565 (	0.53 47
QR5587.C006	5/16	0.	6,5	,4 94	.60 ,!	565 (	0.59 30
QR5587.C007	5/16	0.	7,5	,4 94	.60 ,!	565 (	0.59 31
QR5587.C008	5/16	0.8	з,5	94 ,4	.60 ,!	565 (	0.59 33
QR5587.C009	5/16	0.9	9,5	,4 94	.60 ,!	565 (	0.59 34
QR5587.C011	5/16	1.	1,5	,4 94	.60 ,!	565 (	0.59 35
QR5587.C012	5/16	1.	2,5	94 ,4	.60 ,!	565 (	0.59 36
QR5587.C013	5/16	1.			.60 ,!	565 (	0.59 38
QR5587.C018	5/16	1.5	3,5	,94 ,4	.60 ,!	565 (	0.59 42
QR5587.C020	5/16	2.	O,5	,4 ,4	.60 ,!	565 (	0.59 43
QR5587.C023	5/16	2.			.60 ,!	565 (	0.59 46
QR5587.C026	5/16	2.		,4 ,4	,60 ,9	565 (	0.59 48
QR5587.C033	5/16	3.	3,5	,4 ,4	.60 ,!	565 (	0.59 56
QR5587.C035	5/16	3.	5,5	,4 ,4	.60 ,!	565 (	0.59 59
QR5587.C067	5/16	6.	7,5	,4 ,4	.60 ,!	565 (	0.59 92
QR5587.D008	3/8	0.3			,60 ,9	565 (	0.65 49
QR5587.D009	3/8	0.9	9,5	,4 ,4	,60 ,	565 (	0.65 50
QR5587.D010	3/8	1.			,60 ,	565 (	0.65 52
QR5587.D011	3/8	1.	1,5	,4 ,4	,60 ,!	565 (	0.65 53
QR5587.D012	3/8	1.			,60 ,!	565 (	0.65 54
QR5587.D013	3/8	1.			,60 ,!	565 (	0.65 55
QR5587.D014	3/8	1.4					0.65 55
QR5587.D016	3/8	1.					0.65 61
QR5587.D026	3/8	2.					0.65 73
QR5587.D030	3/8	3.					0.65 80
QR5587.D031	3/8	3.					0.65 82
QR5587.E008	7/16	0.8					0.71 56
QR5587.E020	7/16	2.					0.71 81
QR5587.E022	7/16	2.					0.71 81
QR5587.E024	7/16	2.	,				0.71 88
QR5587.E026	7/16	2.					0.71 88
QR5587.F011	1/2	1.					0.80 88
QR5587.F012	1/2	1.:					0.80 91
QR5587.F013	1/2	1.					0.80 93
QR5587.F014	1/2	1.4					0.80 96
QR5587.F015	1/2	1.					0.80 98
QR5587.F033	1/2	3.					0.80 141
QR5587.F039	1/2	3.					0.80 160
QR5587.F050	1/2	5.					0.80 187
QR5587.F053	1/2	5.					0.80 186
QR5587.F065	1/2	6.					0.80 215
QR5587.F080	1/2	8.					0.80 260
QR5587.G013	9/16	1.	,				0.84 120
QR5587.G030	9/16	3.					0.84 166
QR5587.G037	9/16	3.	,5, /	,4 ,4	,60	565 (	0.84 183
Order No.	Ø f max.	g max.	h min.	Shearing resistanc Ib min.	e, double	Location hole dia max.	n. MS Part No.
QR5587.A008	1.45	0.73	0.08	5.150		0.1940	MS17987C308
QR5587.A008 QR5587.A009	1.45	0.73	0.08	5.150		0.1940	MS17987C308 MS17987C309
QR5587.A009 QR5587.A010	1.45	0.73	0.08	5.150		0.1940	MS17987C309 MS17987C310
QR5587.A010	1.45	0.73	0.08	5.150		0.1940	MS17987C310 MS17987C311
QR5587.A011 QR5587.A012	1.45	0.73	0.08	5.150		0.1940	MS17987C312
ZIUA. VOCCAY	1.45	0.73	0.06	5.150		0.1940	WIS1/96/0312

			teknipart.co.uk	
1.50	0.78	0.08	9.200	0.2540
1.50	0.78	0.08	9.200	0.2540
1.50	0.78	0.08	9.200	0.2540
1.50	0.78	0.08	9.200	0.2540
1.50	0.78	0.08	9.200	0.2540
1.50	0.78	0.08	9.200	0.2540
1.50	0.78	0.08	9.200	0.2540
1.50	0.78	0.08	9.200	0.2540
1.50	0.78	0.08	9.200	0.2540
1.50	0.78	0.08	9.200	0.2540

5.150

5.150

5.150

9.200

0.1940

0.1940

0.1940

0.2540

MS17987C315

MS17987C316

MS17987C325

MS17987C405

MS17987C406

MS17987C407

MS17987C408

MS17987C409

MS17987C410 MS17987C411

MS17987C412

MS17987C414 MS17987C415

MS17987C417

2

QR5587.A015

QR5587.A016

QR5587.A025

QR5587.B005

**OR5587.B006** 

QR5587.B007

QR5587.B008

QR5587.B009

QR5587.B010

QR5587.B011 QR5587.B012

OR5587.B014

QR5587.B015 QR5587.B017 1.45

1.45

1.45

1.50

9

0.73

0.73

0.73

0.78

0.08

0.08

0.08

0.08



# Aviation Pip-Pin, Standard R Handle

Quick Release Pins

•	· · ·	• •	•		
cinal	lo actina	autok ro	loaco ninc	<ul> <li>according</li> </ul>	
SIIIU	le allinu.	UUILKIE	lease Dhis	alluinu	
	· · · · · · · · · · · · · · · · · · ·				

	Øf	a	h	Shearing resistance, double	Location hole dia.	
Order No.	max.	g max.	min.	lb	max.	MS Part No.
				min.		
QR5587.B019	1.50	0.78	0.08	9.200	0.2540	MS17987C419
QR5587.B022	1.50	0.78	0.08	9.200	0.2540	MS17987C422
QR5587.B040	1.50	0.78	0.08	9.200	0.2540	MS17987C440
QR5587.C006	1.65	0.83	0.08	14400	0.3165	MS17987C506
QR5587.C007	1.65	0.83	0.08	14400	0.3165	MS17987C507
QR5587.C008	1.65	0.83	0.08	14400	0.3165	MS17987C508
QR5587.C009	1.65	0.83	0.08	14400	0.3165	MS17987C509
QR5587.C011	1.65	0.83	0.08	14400	0.3165	MS17987C511
QR5587.C012	1.65	0.83	0.08	14400	0.3165	MS17987C512
QR5587.C013	1.65	0.83	0.08	14400	0.3165	MS17987C513
QR5587.C018	1.65	0.83	0.08	14400	0.3165	MS17987C518
QR5587.C020	1.65	0.83	0.08	14400	0.3165	MS17987C520
QR5587.C023	1.65	0.83	0.08	14400	0.3165	MS17987C523
QR5587.C026	1.65	0.83	0.08	14400	0.3165	MS17987C526
QR5587.C033	1.65	0.83	0.08	14400	0.3165	MS17987C533
QR5587.C035	1.65	0.83	0.08	14400	0.3165	MS17987C535
QR5587.C067	1.65	0.83	0.08	14400	0.3165	MS17987C567
QR5587.D008	1.65	0.94	0.08	20700	0.3790	MS17987C608
QR5587.D009	1.65	0.94	0.08	20700	0.3790	MS17987C609
QR5587.D010	1.65	0.94	0.08	20700	0.3790	MS17987C610
QR5587.D011	1.65	0.94	0.08	20700	0.3790	MS17987C611
QR5587.D012	1.65	0.94	0.08	20700	0.3790	MS17987C612
QR5587.D013	1.65	0.94	0.08	20700	0.3790	MS17987C613
QR5587.D014	1.65	0.94	0.08	20700	0.3790	MS17987C614
QR5587.D016	1.65	0.94	0.08	20700	0.3790	MS17987C616
QR5587.D026	1.65	0.94	0.08	20700	0.3790	MS17987C626
QR5587.D030	1.65	0.94	0.08	20700	0.3790	MS17987C630
QR5587.D031	1.65	0.94	0.08	20700	0.3790	MS17987C631
QR5587.E008	1.85	0.98	0.08	28500	0.4425	MS17987C708
QR5587.E020	1.85	0.98	0.08	28500	0.4425	MS17987C720
QR5587.E022	1.85	0.98	0.08	28500	0.4425	MS17987C722
QR5587.E024	1.85	0.98	0.08	28500	0.4425	MS17987C724
QR5587.E026	1.85	0.98	0.08	28500	0.4425	MS17987C726
QR5587.F011	1.85	1.14	0.08	36900	0.5050	MS17987C811
QR5587.F012	1.85	1.14	0.08	36900	0.5050	MS17987C812
QR5587.F013	1.85	1.14	0.08	36900	0.5050	MS17987C813
QR5587.F014	1.85	1.14	0.08	36900	0.5050	MS17987C814
QR5587.F015	1.85	1.14	0.08	36900	0.5050	MS17987C815
QR5587.F033	1.85	1.14	0.08	36900	0.5050	MS17987C833
QR5587.F039	1.85	1.14	0.08	33900	0.5050	MS17987C839
QR5587.F050	1.85	1.14	0.08	36900	0.5050	MS17987C850
QR5587.F053	1.85	1.14	0.08	36900	0.5050	MS17987C853
QR5587.F065	1.85	1.14	0.08	36900	0.5050	MS17987C865
QR5587.F080	1.85	1.14	0.08	36900	0.5050	MS17987C880
QR5587.G013	2.03	1.14	0.08	46700	0.5675	MS17987C913
QR5587.G030	2.03 2.03	1.14 1.14	0.08 0.08	46700 46700	0.5675 0.5675	MS17987C930
QR5587.G037	2.05	1.14	0.06	40/00	0.5675	MS17987C937






### Wixroyd Flight Pin Range - Certified to Aviation Standards

With many years experience producing an extensive range of standard Pip-pins (also know as quick release pins or ball lock pins) we are now able to offer of Aviation Standard approved Pip-pins, manufactured according to NASM norms (formerly MS norms) and tested to NAS 1332 standards.

Expanding Range					
	33600 - Single acting Pip- pin, standard B handle	33610 - Single acting Pip- pin, standard TA handle	33620 - Single acting Pip- pin, standard LA handle	33630 - Single acting Pip- pin, standard R handle	
Wide Range of	Interior panel attach	ment	Curtain track support pins		
Aviation Applications	<ul> <li>Baby bassinet pin</li> </ul>		• TV monitor attachment		
	• Curtain track attachm	ent	<ul> <li>Folding table assemb (e.g. First Class Cabir</li> </ul>	•	
Aviation Approved The Wixroyd Aviation Pip-pin range is produced according to NASM norms, and te standards. Our manufacturing processes have been assessed and certified by EAS Aerospace Supplier Evaluation) to EN9100D.					
	All our Aviation Pip-pins lot number.	are individually marked to	enable identification of th	neir production	
In-Stock and Available?	Yes! The product sizes shown on the following pages, with a cross reference to the NASM part code for ease of identification, are all available from stock for delivery within 5 days.				
Special Designs	We have extensive knowledge and experience in designing, producing and assembling bespoke design pip-pins and ball lock pins in both imperial and metric sizes. We produce under a fully certified manufacturing process, both to our own high standard or to meet Aviation standards.				

Please contact our technical team to discuss your requirements (tel. 0845 26 66 577) or email a drawing to info@wixroyd.com

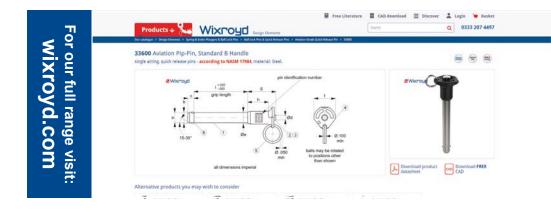



teknipart.co.uk



### Wixroyd Flight Pin Range - Certified to Aviation Standards

Your normal experience may be that imperial Aviation Standard Pip-pins are hard to obtain; price prohibitive, and delivery times far too long. The range of Wixroyd Aviation Pip-pins, in a variety of imperial dimensions, has been designed to solve these problems - we hold a wide, and ever increasing range of sizes ex-stock for immediate delivery - no more 6-8 week lead time!

With many years experience producing an extensive range of standard Pip-pins (also know as quick release pins or ball lock pins) we are now able to offer of Aviation Standard approved Pip-pins, manufactured according to NASM norms (formerly MS norms) and tested to NAS 1332 standards.

<ul> <li>Interior panel attachment</li> </ul>	• Curtain track support pins	Wide Range of
<ul> <li>Baby bassinet pin</li> </ul>	<ul> <li>TV monitor attachment</li> </ul>	<b>Aviation Applications</b>
Curtain track attachment	<ul> <li>Folding table assembly (e.g. First Class Cabins)</li> </ul>	
Yes! The product sizes shown on the followin ease of identification, are all available from	g pages, with a cross reference to the NASM part code for stock for delivery within 5 days.	In-stock and Available
	ASM norms, and we follow the material specification of in purchasing a part which is to specification - both in	Materials
ASD-EASE GAIRBUS Statement of Assessment	The new Wixroyd Aviation Pip-pin range is produced according to NASM norms, and tested to NAS standards. Our manufacturing processes have been assessed and certified by EASE (European Aerospace Supplier Evaluation) to EN9100D.	Aviation Approved
All our Aviation Pip-pins are individually ma number. Marking allows identification of:	rked to enable identification of their production lot	Identifying Production Batches
<ul> <li>NASM Standard Number</li> </ul>	Grip length	
<ul> <li>Material Grade</li> </ul>	<ul> <li>Company identification</li> </ul>	
<ul> <li>Pin/shank diameter</li> </ul>	• Production lot number.	
	e in designing, producing and assembling bespoke perial and metric sizes. We produce under a fully certified h standard or to meet Aviation standards.	Special Designs

We can customise to meet your needs:

- Changes in grip/handle type
- Material variations
- Changes of functional dimensions; pin diameter, pin grip length

Please contact our technical team to discuss your requirements (tel. 0845 26 66 577) or email a drawing to info@wixroyd.com









### **Expanding Range**

Single acting Pip-pin, standard B handle



Teknipart AN ESSENTRA COMPANY Single acting Pip-pin, standard LA handle Single acting Pip-pin, standard R handle

info@teknipart.co.uk