


## **Compression Locks**

lever latch - adjustable grip - zinc



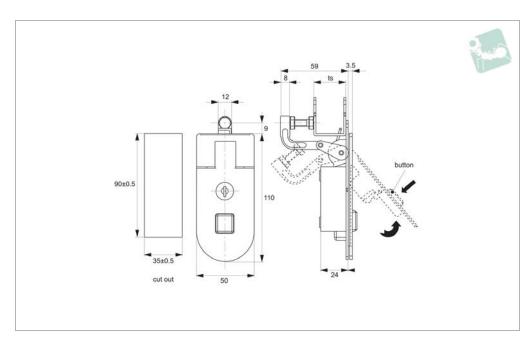

**CC1220** 

#### Material

Body and handle: die cast zinc, black power coated. Cylinder lock: die cast zinc. Screw: steel, white zinc plated.

Supplied with: KEY.

**Technical Notes** Grip adjustment 31-48mm.

#### Tips

Quick-open, easy assembling. Grip length can be adjusted via clamping screw to suit your application.

Order No. CC1220.M0310

Finish Black Coated

Lock type Std. Cylinder ts grip adj. 31-48



### **Selecting the Correct Cam Latch or Lock**




When selecting a Wixroyd Cam Latch for your application, you need to answer these questions:

- 1. Which installation cut out?
- 3. Which locking key?
- 5. Which cam type and size?

- 2. Which body style?
- 4. Which accessories?

#### Step 1: Which installation cut out?

All our Flexi-System cam latches use a standard installation cut out 22,2 dia, 20,2 square, for maximum flexibility. We also provide a number of alternative cut out dimensions for legacy/historical installations.



flexi-system cut out

Typically single point latching is required, but the

Wixroyd Flexi-System also provides multi-point latching (typically 3 point - at lock point, top and

Number of latching points in application

#### Step 2: Which body style?

#### Material and finish

Select from our variety of die cast zinc, polyamide plastic and stainless versions.















zinc chrome plate

Die-cast zinc black coated

Polyamide

Single point

Two point

bottom of cabinet).

Multi-point

#### **Actuation and locking method**

Standard insert driver type, cylinder lock or wing handle type.







Cylinder lock Wing handle

#### Step 3: Which locking key?

#### **Standard insert** driver keys

Our range of insert driver cam latches require a simple key to actuate. Refer to part A0102 and A0103 for correct keys.





#### **Cylinder locking**

Our cam locks with cylinder locks are supplied with two keys per lock. Available as keyed alike or keyed to differ locks.



#### Step 4: Which accessories?

- Multi-point latching: use our rod set A0303 to A0325 for suitable rods and rod guides.
- Finger pulls: easily installed with any of our flexi-system cam bodies, finger pull no. A0352 is a simple, cost effective handle for your cabinets.
- Dust Cap: to reduce material ingress.







## Vixroyd Cam and Compression Latches

product selection charts

		tuat etho			E	Body	/	Fi	nish	es	Ca Ty		
Miscellaneous Cut out				mm)		stic	_	<b>-</b>				_	
Janeous	iver	Lock	Grip	length (mm	Zinc	Polyamide Plastic	Stainless Steel	Chrome Plated	ated		With Projection	W/O Projection	
Miscell	nsert Driver	Sylinder Lock	lanual/Grip	y len	Die-Cast Zinc	amid	nless	ome	Black Coated	ıral	Pro I	Pro	IP Rating
		0	≥	Bod						Natura	With	W/C	IP R
A1192 - Mini Can	n La	tch ·	- Wi	ng H	and  	le - I	Fixe	d Gı 	rip				
			✓	10 Cams	<b>√</b>	ınnl	iod	<b>√</b>	ve: l	NI/A			
A1506 - Panel La	tche	s - I	Fixe	d Gri	s. ૩։ <b>p</b>	ıhhı	ieu	- 1/6	ys. 1	W/A			
THE STATE OF THE S	1			25			✓			1			54
			0		C	1: -	-1	 	- · · · · · ·	210			
A1520 - Cam Loc	k - F	ixed		ams: ip	Sup	plie	- D	neys	s: A(	J102	_		
	1			18		1				1			
11510 0 11				 ams:	Sup	plie	ed -	 Keys	s: A(	0102	2		
A1546 - Panel La	tch ·	- Un	COV	ered									
le le			1		1			1					
A1561 - Panel La	tch -	- wit		Cam:	s: Sı	lqqu	ied	- Ke	ys: l	N/A			
			•										
	1			22,5		1				1			
				l Cam:	l s: Sι	ıppl	ied	l - Kej	ys: l	N/A			
A1701 - Compres	sion	Lat	ch -	Leve	er La	atch	- FI	ush	Trig	ger			
	1				1				1				
A1707 - Compres	sion	lat		Cam							r		
TE Comples	3101	Lat			. <u>.</u> .		11.0		u 11	.556			
	1			19	1				/				
A1751 - Compres	sion	l a t		ms: S				(eys:	Su	pplie	ed		
60	3101	Lat	.CII -	Leve	, La	atoll							
		1			1				1				
				l Cam:	s: N.	/A -	Key	s: S	upp	lied			

	Actuation Method				-	Body	/	Fi	nish	es	Ca		
t out	IVI	etno	a	5		<u>.</u> 2					Туре		
Miscella Reous Cut out	Insert Driver	Cylinder Lock	Manual/Grip	Body length (mm)	Die-Cast Zinc	Polyamide Plastic	Stainless Steel	Chrome Plated	<b>Black Coated</b>	Natural	With Projection	W/O Projection	IP Rating
A4241 - Cam Latc	h - w	ith I	Rod	Con	trol ·	- Ext	ende	ed C	over				
	✓	0	٨			✓ ••••	4 0/	0046		✓	401	✓	40
1				020						_			
A4260 - Cam Lock	- wi	th R	od (	Cont	rol -	Wir	ıg H	andl	e - E	Exte	nde	d Co	over
		1				1				1		✓	54
1		Carr	ns: A	020	3, A	022	4, A0	)240	) - K	eys:	A01	02	
<b>A4221</b> - Cam Latc	h - w	ith I	Rod	Con	trol	- wi	th C	over					
	1		0.00	Various	020	✓ 2. ∧/	222	1 1/2		✓ ∧01	102	<b>√</b>	
ď.	Cams: A0203, A0224 - Keys: A0102									102			

# Cam Latches and Locks

## Wixroyd Cam and Compression Latches

product selection charts

		ation		ı	Body	/	Fi	nish	es	Ca		
cutout	Wet	hod	Œ		ţic					Тур	Эе	
eous	<u> </u>	i č	h (m	nc	yamide Plastic	teel	ated	eq		ction	ction	
ccellan	Driv	ninger Loc anual/Grip	engt	ıst Zi	nide	ss S	e Pi	Coat	=	roje	roje	ing
Miscella Reout Cut out	nsert Driver	Junger Loci Manual/Grip	Body length (mm	Die-Cast Zinc	olyar	tainless Steel	Chrome Plated	Black Coatec	Vatura	/ith Projection	V/O Projection	P Rating
A1192 - Mini Can	_ \	_			e -	G)			Z	>	>	=
		1	10	1			1					
A1506 - Panel La	tchoc	Fivo	d Gri	ι s: Sι	lqqu	ied	- Ke	ys: ľ	N/A			
A1300 - I allei La	CIICS	- I IAC		P								
	,		25			,			,			54
1.50	•		23			•			•			54
		C	 ams:	Sur	pplie	ed -	 Kev	s: Ar	0103	2		
A1520 - Cam Loc	k - Fix			ı	эрпс	, u	ı (Oy)	J. 7 (C	7102	-		
	1		18		✓				✓			
Cams: Supplied - Keys: A0102  A1546 - Panel Latch - Uncovered												
A1540 - Tallet Ea	ton - C	JIICOV										
		./		./			./					
(e)		•		ľ								
			 Cam	 s: Si	ınnl	ied	 - Ke	vs. [	<b>\</b> /Δ			
A1561 - Panel La	tch - v				иррі	100	110	y 5. 1	1771			
	✓		22,5		1				1			
			ı Cam						l	-		
A1701 - Compres	sion L	atch -	Leve	er La	atch	- FI	ush	Trig	ger			
	/			/				1				
0			<u></u>	NI	/ A	17		1	1:1			
A1707 - Compres	sion L		Cam Leve							r		
8												
	/		19	1				1				
G			ms:				eys:	Su	plie	ed		
A1751 - Compres	sion L	atch -	Leve	er La	itch							
		,										
	V	/		/				/				
			Corr	C. N.	/ A	IZ -	C. C		licel			
			Cams: N/A - Keys: Supplied									

u <sup>t.</sup>		tuat etho			ı	Body	/	Fi	nish	es	Ca Ty		
Miscellateous Cut out.	Insert Driver	Cylinder Lock	Manual/Grip	Body length (mm)	Die-Cast Zinc	Polyamide Plastic		Chrome Plated		Natural	With Projection	W/O Projection	IP Rating
A4241 - Calli Latti	11 - W	/IUII	Rou	Con	Lroi ·	- EXU	ena	eu C	over				
-	1					✓				1		✓	40
7									,				
Cams: A0203, A0224, A0240 - Keys: A0102  A4260 - Cam Lock - with Rod Control - Wing Handle - Extended Cove													
A4260 - Cam Lock	- w	ıtıı R	oa (	50∏€ 	roi -	WIL	ıg n	andi 	e - c	xte	naec	ı C	ovei 
		1				1				1		1	54
		Can	ns: A	020	3, A	022	4, A(	)240	) - K	eys:	A01	102	1
A4221 - Cam Latcl	h - w	/ith	Rod	Con	trol	- wi	th C	over					
	1			Various		1				1		✓	
ā-			Carr	ns: A	020	3, A(	0224	1 - K	leys:	A01	102		