



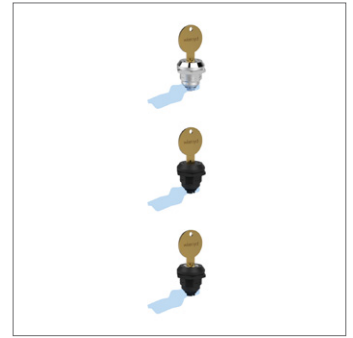

# Cam Locks - Flexi-System

fixed grip - zinc

## Locks

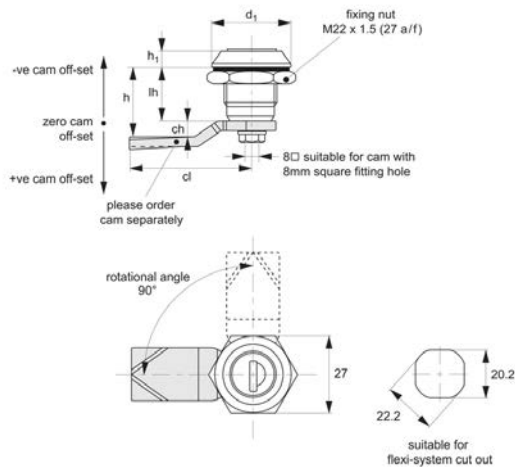

**CC2010**

LOCKS

### Material

**Type one & Two:** Body: die cast zinc, finished in chrome plate or black powder coating.

Cylinder lock: die cast zinc, chrome plated.

**Type Three:** Body: polyamide.

Cylinder lock: die cast zinc, chrome plated.

**Supplied with:** Keys: two per lock.

**Not supplied:** CAM - order separately.

### Technical Notes

Order cam separately.

**Cams:** see suitable cam CC0020, and CC0040. Select „without projection“ cam type.

Dimensions ch and cl relate to cam. Use formula to calculate ch (required cam off-set), and refer to cam selection chart;

$ch = h - lh$  where;

ch = required cam off-set/height.

h = grip length (distance between inside of latch face and front of cam).

lh = body length of cam latch/lock to be

used (see product table below).

**Rods & Guides:** to achieve 3-point latching - CC0340, CC0350, CC0355.

### Tips

Quarter turn opening or closing.  
Universal left and right application.

### Important Notes

Sold subject to pack quantity.