




# Male-Female Hexagonal Spacers

## Natural PEEK

## Other Plastics

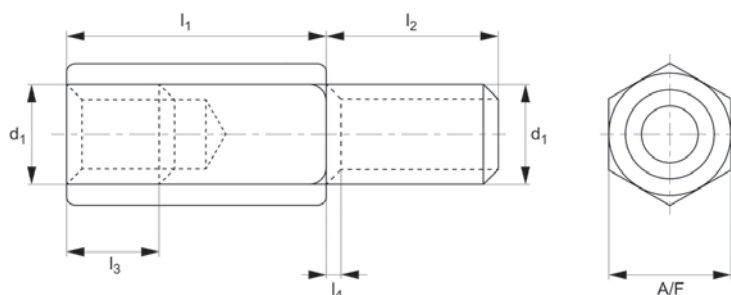

**N0504.NP**

OTHER PLASTICS

### Material

Natural Polyether-ether-ketone (PEEK).  
Beige.

durability and wear resistance. PEEK has excellent chemical resistance and performs well at temperatures up to 260°C. Tensile strength ~116N/mm<sup>2</sup>.

### Technical Notes

P = Thread Pitch. Thread sizes stated are standard coarse.

A high performance plastic with very good

| Order No.        | d <sub>1</sub> | l <sub>1</sub><br>+/- 0.2 | l <sub>2</sub> | l <sub>3</sub> | l <sub>4</sub><br>max. | A/F  |
|------------------|----------------|---------------------------|----------------|----------------|------------------------|------|
| N0504.030-005-NP | M 3            | 5                         | 6              | 2.5            | 1.0                    | 5.5  |
| N0504.030-008-NP | M 3            | 8                         | 6              | 5.0            | 1.0                    | 5.5  |
| N0504.030-010-NP | M 3            | 10                        | 6              | 5.0            | 1.0                    | 5.5  |
| N0504.030-012-NP | M 3            | 12                        | 6              | 6.5            | 1.0                    | 5.5  |
| N0504.030-015-NP | M 3            | 15                        | 6              | 7.5            | 1.0                    | 5.5  |
| N0504.030-018-NP | M 3            | 18                        | 6              | 8.0            | 1.0                    | 5.5  |
| N0504.030-020-NP | M 3            | 20                        | 6              | 7.0            | 1.0                    | 5.5  |
| N0504.030-025-NP | M 3            | 25                        | 6              | 7.0            | 1.0                    | 5.5  |
| N0504.030-030-NP | M 3            | 30                        | 6              | 7.0            | 1.0                    | 5.5  |
| N0504.040-005-NP | M 4            | 5                         | 8              | 2.3            | 1.4                    | 7.0  |
| N0504.040-008-NP | M 4            | 8                         | 8              | 4.5            | 1.4                    | 7.0  |
| N0504.040-010-NP | M 4            | 10                        | 8              | 6.0            | 1.4                    | 7.0  |
| N0504.040-012-NP | M 4            | 12                        | 8              | 8.0            | 1.4                    | 7.0  |
| N0504.040-015-NP | M 4            | 15                        | 8              | 9.0            | 1.4                    | 7.0  |
| N0504.040-018-NP | M 4            | 18                        | 8              | 9.0            | 1.4                    | 7.0  |
| N0504.040-025-NP | M 4            | 25                        | 8              | 9.0            | 1.4                    | 7.0  |
| N0504.040-030-NP | M 4            | 30                        | 8              | 9.0            | 1.4                    | 7.0  |
| N0504.040-035-NP | M 4            | 35                        | 8              | 9.0            | 1.4                    | 7.0  |
| N0504.050-008-NP | M 5            | 8                         | 10             | 5.0            | 1.6                    | 8.0  |
| N0504.050-010-NP | M 5            | 10                        | 10             | 5.5            | 1.6                    | 8.0  |
| N0504.050-012-NP | M 5            | 12                        | 10             | 8.0            | 1.6                    | 8.0  |
| N0504.050-015-NP | M 5            | 15                        | 10             | 9.0            | 1.6                    | 8.0  |
| N0504.050-018-NP | M 5            | 18                        | 10             | 10.0           | 1.6                    | 8.0  |
| N0504.050-020-NP | M 5            | 20                        | 10             | 11.0           | 1.6                    | 8.0  |
| N0504.050-025-NP | M 5            | 25                        | 10             | 11.0           | 1.6                    | 8.0  |
| N0504.050-030-NP | M 5            | 30                        | 10             | 11.0           | 1.6                    | 8.0  |
| N0504.050-035-NP | M 5            | 35                        | 10             | 11.0           | 1.6                    | 8.0  |
| N0504.050-040-NP | M 5            | 40                        | 10             | 11.0           | 1.6                    | 8.0  |
| N0504.060-010-NP | M 6            | 10                        | 12             | 6.0            | 2.0                    | 10.0 |
| N0504.060-012-NP | M 6            | 12                        | 12             | 6.0            | 2.0                    | 10.0 |
| N0504.060-015-NP | M 6            | 15                        | 12             | 11.0           | 2.0                    | 10.0 |
| N0504.060-018-NP | M 6            | 18                        | 12             | 12.0           | 2.0                    | 10.0 |
| N0504.060-020-NP | M 6            | 20                        | 12             | 12.0           | 2.0                    | 10.0 |



| Order No.               | d <sub>1</sub> | l <sub>1</sub><br>+/- 0.2 | l <sub>2</sub> | l <sub>3</sub> | l <sub>4</sub><br>max. | A/F  |
|-------------------------|----------------|---------------------------|----------------|----------------|------------------------|------|
| <b>N0504.060-025-NP</b> | M 6            | 25                        | 12             | 12.0           | 2.0                    | 10.0 |
| <b>N0504.060-030-NP</b> | M 6            | 30                        | 12             | 12.0           | 2.0                    | 10.0 |
| <b>N0504.060-035-NP</b> | M 6            | 35                        | 12             | 12.0           | 2.0                    | 10.0 |
| <b>N0504.060-040-NP</b> | M 6            | 40                        | 12             | 12.0           | 2.0                    | 10.0 |