




Quick Release Pins - Inch - Cup handle stainless pin - stainless handle

Quick Release Pins

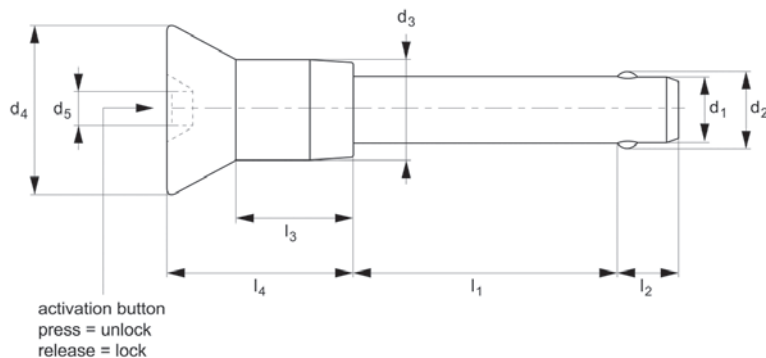

QR1474

QUICK RELEASE PINS

Material

Pin: stainless steel, AISI 304 (DIN 1.4301) or AISI 303 (DIN 1.4305), passivated.

Tensile strength 500 N/mm² min. RoHS compliant.

Handle: stainless steel, AISI 303 (DIN 1.4305), passivated.

Actuator button: stainless steel, AISI 303

(DIN 1.4305), passivated.

Internal spindle and balls; from stainless steel. Split ring not supplied.

Technical Notes

Pressing = unlocking.

Releasing = locking.

Temperature range -30°C to +150°.

Tips

For quick fastening and locking frequently repeated connections.

For lanyards & retaining cables see part nos. L to LA1224. For easy install locating bushes and end caps see part nos. LA1260 to LA1355.

Order No.	d ₁	d ₁	d ₁	l ₁ grip	Material	d ₂	d ₃	d ₄
QR1474.I25-050-S	1/4	0.2485	0.2470	0.50	304 SS	0.289	0.47	0.81
QR1474.I25-075-S	1/4	0.2485	0.2470	0.75	304 SS	0.289	0.47	0.81
QR1474.I25-100-S	1/4	0.2485	0.2470	1.00	304 SS	0.289	0.47	0.81
QR1474.I25-125-S	1/4	0.2485	0.2470	1.25	304 SS	0.289	0.47	0.81
QR1474.I25-150-S	1/4	0.2485	0.2470	1.50	304 SS	0.289	0.47	0.81
QR1474.I25-175-S	1/4	0.2485	0.2470	1.75	304 SS	0.289	0.47	0.81
QR1474.I25-200-S	1/4	0.2485	0.2470	2.00	304 SS	0.289	0.47	0.81
QR1474.I25-250-S	1/4	0.2485	0.2470	2.50	304 SS	0.289	0.47	0.81
QR1474.I25-300-S	1/4	0.2485	0.2470	3.00	304 SS	0.289	0.47	0.81
QR1474.I25-350-S	1/4	0.2485	0.2470	3.50	304 SS	0.289	0.47	0.81
QR1474.I25-400-S	1/4	0.2485	0.2470	4.00	304 SS	0.289	0.47	0.81
QR1474.I31-050-S	5/16	0.3110	0.3095	0.50	304 SS	0.375	0.47	0.81
QR1474.I31-075-S	5/16	0.3110	0.3095	0.75	304 SS	0.375	0.47	0.81
QR1474.I31-100-S	5/16	0.3110	0.3095	1.00	304 SS	0.375	0.47	0.81
QR1474.I31-125-S	5/16	0.3110	0.3095	1.25	304 SS	0.375	0.47	0.81
QR1474.I31-150-S	5/16	0.3110	0.3095	1.50	304 SS	0.375	0.47	0.81
QR1474.I31-175-S	5/16	0.3110	0.3095	1.75	304 SS	0.375	0.47	0.81
QR1474.I31-200-S	5/16	0.3110	0.3095	2.00	304 SS	0.375	0.47	0.81
QR1474.I31-250-S	5/16	0.3110	0.3095	2.50	304 SS	0.375	0.47	0.81
QR1474.I31-300-S	5/16	0.3110	0.3095	3.00	304 SS	0.375	0.47	0.81
QR1474.I31-350-S	5/16	0.3110	0.3095	3.50	304 SS	0.375	0.47	0.81
QR1474.I31-400-S	5/16	0.3110	0.3095	4.00	304 SS	0.375	0.47	0.81
QR1474.I37-050-S	3/8	0.3735	0.3095	0.50	304 SS	0.440	0.56	0.94
QR1474.I37-075-S	3/8	0.3735	0.3095	0.75	304 SS	0.440	0.56	0.94
QR1474.I37-100-S	3/8	0.3735	0.3095	1.00	304 SS	0.440	0.56	0.94
QR1474.I37-125-S	3/8	0.3735	0.3095	1.25	304 SS	0.440	0.56	0.94
QR1474.I37-150-S	3/8	0.3735	0.3095	1.50	304 SS	0.440	0.56	0.94
QR1474.I37-175-S	3/8	0.3735	0.3095	1.75	304 SS	0.440	0.56	0.94
QR1474.I37-200-S	3/8	0.3735	0.3095	2.00	304 SS	0.440	0.56	0.94
QR1474.I37-250-S	3/8	0.3735	0.3095	2.50	304 SS	0.440	0.56	0.94

Quick Release Pins

Quick Release Pins - Inch - Cup handle stainless pin - stainless handle



QUICK RELEASE PINS

Order No.	d ₁	d ₁	d ₁	l ₁ grip	Material	d ₂	d ₃	d ₄
QR1474.I37-300-S	3/8	0.3735	0.3095	3.00	304 SS	0.440	0.56	0.94
QR1474.I37-350-S	3/8	0.3735	0.3095	3.50	304 SS	0.440	0.56	0.94
QR1474.I37-400-S	3/8	0.3735	0.3095	4.00	304 SS	0.440	0.56	0.94
QR1474.I50-100-S	1/2	0.4985	0.4970	1.00	304 SS	0.594	0.72	1.12
QR1474.I50-125-S	1/2	0.4985	0.4970	1.25	304 SS	0.594	0.72	1.12
QR1474.I50-150-S	1/2	0.4985	0.4970	1.50	304 SS	0.594	0.72	1.12
QR1474.I50-175-S	1/2	0.4985	0.4970	1.75	304 SS	0.594	0.72	1.12
QR1474.I50-200-S	1/2	0.4985	0.4970	2.00	304 SS	0.594	0.72	1.12
QR1474.I50-250-S	1/2	0.4985	0.4970	2.50	304 SS	0.594	0.72	1.12
QR1474.I50-300-S	1/2	0.4985	0.4970	3.00	304 SS	0.594	0.72	1.12
QR1474.I50-350-S	1/2	0.4985	0.4970	3.50	304 SS	0.594	0.72	1.12
QR1474.I50-400-S	1/2	0.4985	0.4970	4.00	304 SS	0.594	0.72	1.12
QR1474.I50-450-S	1/2	0.4985	0.4970	4.50	304 SS	0.594	0.72	1.12
QR1474.I50-500-S	1/2	0.4985	0.4970	5.00	304 SS	0.594	0.72	1.12
QR1474.I50-550-S	1/2	0.4985	0.4970	5.50	304 SS	0.594	0.72	1.12
QR1474.I50-600-S	1/2	0.4985	0.4970	6.00	304 SS	0.594	0.72	1.12

Order No.	d ₅	l ₂	l ₃	l ₄	Loc'n hole	Pull out strength lb	Calc. double shear lb
QR1474.I25-050-S	0.23	0.290	0.64	0.97	,2500/,2540	230	2200
QR1474.I25-075-S	0.23	0.290	0.64	0.97	,2500/,2540	230	2200
QR1474.I25-100-S	0.23	0.290	0.64	0.97	,2500/,2540	230	2200
QR1474.I25-125-S	0.23	0.290	0.64	0.97	,2500/,2540	230	2200
QR1474.I25-150-S	0.23	0.290	0.64	0.97	,2500/,2540	230	2200
QR1474.I25-175-S	0.23	0.290	0.64	0.97	,2500/,2540	230	2200
QR1474.I25-200-S	0.23	0.290	0.64	0.97	,2500/,2540	230	2200
QR1474.I25-250-S	0.23	0.290	0.64	0.97	,2500/,2540	230	2200
QR1474.I25-300-S	0.23	0.290	0.64	0.97	,2500/,2540	230	2200
QR1474.I25-350-S	0.23	0.290	0.64	0.97	,2500/,2540	230	2200
QR1474.I25-400-S	0.23	0.290	0.64	0.97	,2500/,2540	230	2200
QR1474.I31-050-S	0.23	0.330	0.64	0.97	,3125/,3165	510	3500
QR1474.I31-075-S	0.23	0.330	0.64	0.97	,3125/,3165	510	3500
QR1474.I31-100-S	0.23	0.330	0.64	0.97	,3125/,3165	510	3500
QR1474.I31-125-S	0.23	0.330	0.64	0.97	,3125/,3165	510	3500
QR1474.I31-150-S	0.23	0.330	0.64	0.97	,3125/,3165	510	3500
QR1474.I31-175-S	0.23	0.330	0.64	0.97	,3125/,3165	510	3500
QR1474.I31-200-S	0.23	0.330	0.64	0.97	,3125/,3165	510	3500
QR1474.I31-250-S	0.23	0.330	0.64	0.97	,3125/,3165	510	3500
QR1474.I31-300-S	0.23	0.330	0.64	0.97	,3125/,3165	510	3500
QR1474.I31-350-S	0.23	0.330	0.64	0.97	,3125/,3165	510	3500
QR1474.I31-400-S	0.23	0.330	0.64	0.97	,3125/,3165	510	3500
QR1474.I37-050-S	0.29	0.365	0.66	1.06	,3750/,3790	575	4500
QR1474.I37-075-S	0.29	0.365	0.66	1.06	,3750/,3790	575	4500
QR1474.I37-100-S	0.29	0.365	0.66	1.06	,3750/,3790	575	4500
QR1474.I37-125-S	0.29	0.365	0.66	1.06	,3750/,3790	575	4500
QR1474.I37-150-S	0.29	0.365	0.66	1.06	,3750/,3790	575	4500
QR1474.I37-175-S	0.29	0.365	0.66	1.06	,3750/,3790	575	4500
QR1474.I37-200-S	0.29	0.365	0.66	1.06	,3750/,3790	575	4500
QR1474.I37-250-S	0.29	0.365	0.66	1.06	,3750/,3790	575	4500
QR1474.I37-300-S	0.29	0.365	0.66	1.06	,3750/,3790	575	4500
QR1474.I37-350-S	0.29	0.365	0.66	1.06	,3750/,3790	575	4500
QR1474.I37-400-S	0.29	0.365	0.66	1.06	,3750/,3790	575	4500
QR1474.I50-100-S	0.42	0.460	0.89	1.31	,5000/,5050	1160	11500
QR1474.I50-125-S	0.42	0.460	0.89	1.31	,5000/,5050	1160	11500
QR1474.I50-150-S	0.42	0.460	0.89	1.31	,5000/,5050	1160	11500
QR1474.I50-175-S	0.42	0.460	0.89	1.31	,5000/,5050	1160	11500
QR1474.I50-200-S	0.42	0.460	0.89	1.31	,5000/,5050	1160	11500
QR1474.I50-250-S	0.42	0.460	0.89	1.31	,5000/,5050	1160	11500
QR1474.I50-300-S	0.42	0.460	0.89	1.31	,5000/,5050	1160	11500
QR1474.I50-350-S	0.42	0.460	0.89	1.31	,5000/,5050	1160	11500
QR1474.I50-400-S	0.42	0.460	0.89	1.31	,5000/,5050	1160	11500
QR1474.I50-450-S	0.42	0.460	0.89	1.31	,5000/,5050	1160	11500
QR1474.I50-500-S	0.42	0.460	0.89	1.31	,5000/,5050	1160	11500
QR1474.I50-550-S	0.42	0.460	0.89	1.31	,5000/,5050	1160	11500
QR1474.I50-600-S	0.42	0.460	0.89	1.31	,5000/,5050	1160	11500