




Ball Lock Pins - Single Acting - Grey self-locking - stainless steel 1.4542 (AISI 630)

Quick Release Pins

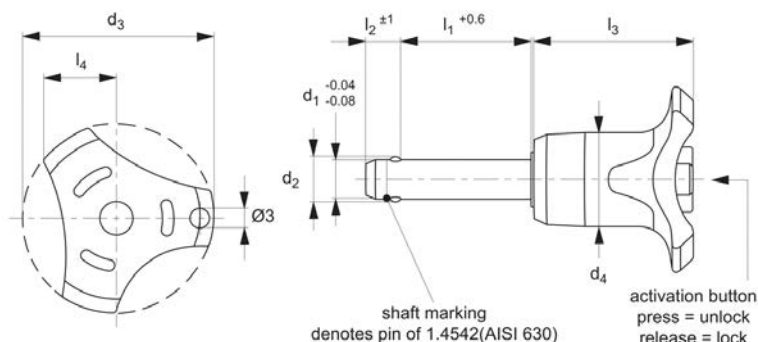

QR1716

QUICK RELEASE PINS

Material

Pin: stainless steel 1,4542 (AISI 630),
precipitation hardened, blast finish.
(marked at end of shaft to denote 1.4542
material).
Ball: stainless steel 1.3541
Spring: stainless steel.
Handle: thermoplastic PA 6.
Available colours: grey/orange, grey/blue,
grey/grey, black/black.

Technical Notes

Pressing = unlocking.
Releasing = locking.
Temperature resistance -30°C to +80°C.
For quick fastening and locking of
frequently repeated connections.

Tips

For lanyards & retaining cables see part
no.LA1066. Easy install locating bushes

available see part no.LA1310.

Important Notes

**Extreme load capacity due to high mate-
rial grade.**

*Shearing resistance similar to DIN 50141.
Also available in stainless grade 1.4305
(AISI 303), see part no.33080.

Order No.	d ₁	l ₁	d ₂	d ₃	d ₄	l ₂	l ₃	l ₄	Loc'n hole tol. H11	Shearing resistance, double kN min.	Weight g
QR1716.M05-010-T	5	10	5.5	33.2	14.5	6.0	26.7	10.8	5	24	15
QR1716.M05-015-T	5	15	5.5	33.2	14.5	6.0	26.7	10.8	5	24	15
QR1716.M05-020-T	5	20	5.5	33.2	14.5	6.0	26.7	10.8	5	24	16
QR1716.M05-025-T	5	25	5.5	33.2	14.5	6.0	26.7	10.8	5	24	17
QR1716.M05-030-T	5	30	5.5	33.2	14.5	6.0	26.7	10.8	5	24	18
QR1716.M06-010-T	6	10	7.0	33.2	14.5	7.0	26.7	10.8	6	35	16
QR1716.M06-015-T	6	15	7.0	33.2	14.5	7.0	26.7	10.8	6	35	17
QR1716.M06-020-T	6	20	7.0	33.2	14.5	7.0	26.7	10.8	6	35	18
QR1716.M06-025-T	6	25	7.0	33.2	14.5	7.0	26.7	10.8	6	35	19
QR1716.M06-030-T	6	30	7.0	33.2	14.5	7.0	26.7	10.8	6	35	20
QR1716.M06-035-T	6	35	7.0	33.2	14.5	7.0	26.7	10.8	6	35	21
QR1716.M06-040-T	6	40	7.0	33.2	14.5	7.0	26.7	10.8	6	35	22
QR1716.M06-045-T	6	45	7.0	33.2	14.5	7.0	26.7	10.8	6	35	23
QR1716.M06-050-T	6	50	7.0	33.2	14.5	7.0	26.7	10.8	6	35	24
QR1716.M08-020-T	8	20	9.6	39.2	18.4	8.2	33.3	13.4	8	63	40
QR1716.M08-025-T	8	25	9.6	39.2	18.4	8.2	33.3	13.4	8	63	42
QR1716.M08-030-T	8	30	9.6	39.2	18.4	8.2	33.3	13.4	8	63	44
QR1716.M08-035-T	8	35	9.6	39.2	18.4	8.2	33.3	13.4	8	63	46
QR1716.M08-040-T	8	40	9.6	39.2	18.4	8.2	33.3	13.4	8	63	47
QR1716.M08-045-T	8	45	9.6	39.2	18.4	8.2	33.3	13.4	8	63	49
QR1716.M08-050-T	8	50	9.6	39.2	18.4	8.2	33.3	13.4	8	63	51
QR1716.M10-020-T	10	20	12.0	39.2	18.4	9.6	33.3	13.4	10	100	47
QR1716.M10-025-T	10	25	12.0	39.2	18.4	9.6	33.3	13.4	10	100	49
QR1716.M10-030-T	10	30	12.0	39.2	18.4	9.6	33.3	13.4	10	100	53
QR1716.M10-035-T	10	35	12.0	39.2	18.4	9.6	33.3	13.4	10	100	55
QR1716.M10-040-T	10	40	12.0	39.2	18.4	9.6	33.3	13.4	10	100	58

Quick Release Pins


Ball Lock Pins - Single Acting - Grey

self-locking - stainless steel 1.4542 (AISI 630)



QUICK RELEASE PINS

Order No.	d ₁	l ₁	d ₂	d ₃	d ₄	l ₂	l ₃	l ₄	Loc'n hole tol. H11	Shearing resistance, double kN min.	Weight g
QR1716.M10-045-T	10	45	12.0	39.2	18.4	9.6	33.3	13.4	10	100	61
QR1716.M10-050-T	10	50	12.0	39.2	18.4	9.6	33.3	13.4	10	100	64
QR1716.M10-060-T	10	60	12.0	39.2	18.4	9.6	33.3	13.4	10	100	70
QR1716.M12-025-T	12	25	14.5	47.6	25.2	10.6	39.7	16.7	12	144	96
QR1716.M12-030-T	12	30	14.5	47.6	25.2	10.6	39.7	16.7	12	144	100
QR1716.M12-035-T	12	35	14.5	47.6	25.2	10.6	39.7	16.7	12	144	105
QR1716.M12-040-T	12	40	14.5	47.6	25.2	10.6	39.7	16.7	12	144	109
QR1716.M12-045-T	12	45	14.5	47.6	25.2	10.6	39.7	16.7	12	144	113
QR1716.M12-050-T	12	50	14.5	47.6	25.2	10.6	39.7	16.7	12	144	117
QR1716.M12-060-T	12	60	14.5	47.6	25.2	10.6	39.7	16.7	12	144	126
QR1716.M12-070-T	12	70	14.5	47.6	25.2	10.6	39.7	16.7	12	144	134
QR1716.M12-080-T	12	80	14.5	47.6	25.2	10.6	39.7	16.7	12	144	143
QR1716.M16-030-T	16	30	19.0	47.6	25.2	14.0	39.7	16.7	16	257	132
QR1716.M16-035-T	16	35	19.0	47.6	25.2	14.0	39.7	16.7	16	257	140
QR1716.M16-040-T	16	40	19.0	47.6	25.2	14.0	39.7	16.7	16	257	148
QR1716.M16-045-T	16	45	19.0	47.6	25.2	14.0	39.7	16.7	16	257	155
QR1716.M16-050-T	16	50	19.0	47.6	25.2	14.0	39.7	16.7	16	257	168
QR1716.M16-060-T	16	60	19.0	47.6	25.2	14.0	39.7	16.7	16	257	178
QR1716.M16-070-T	16	70	19.0	47.6	25.2	14.0	39.7	16.7	16	257	194
QR1716.M16-080-T	16	80	19.0	47.6	25.2	14.0	39.7	16.7	16	257	208
QR1716.M20-060-T	20	60	25.0	57.1	33.8	20.5	50.7	21.5	20	403	343
QR1716.M20-080-T	20	80	25.0	57.1	33.8	20.5	50.7	21.5	20	403	392
QR1716.M20-100-T	20	100	25.0	57.1	33.8	20.5	50.7	21.5	20	403	440
QR1716.M20-120-T	20	120	25.0	57.1	33.8	20.5	50.7	21.5	20	403	488





Wixroyd Ball Lock Pins

applications

33060 - 33250
Positioning Elements




Sound Rigging Systems

Ball lock pins on a sound rigging system. Offering secure fixing with high shear forces and easy fitting for operators at heights.

In addition full black powder coating of grip and actuation button eliminates glare from other stage lighting.

QUICK RELEASE PINS

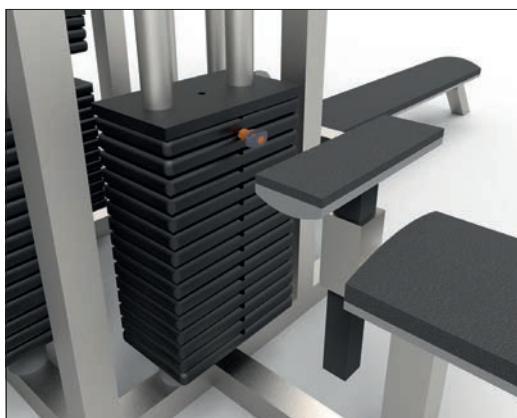

Gym Equipment



Scientific and Medical



Pin Material

1.4305 (AISI 303) - shear force approx.
60% of higher material version 1.4542

1.4542 (AISI 630) - identified by the ridge
on the pin

CRES 17-4PH (AMS 5643) aviation standard



Handle Style




Plastic tri-star



T-handled, metal



L-handled, metal



Mushroom, metal



Single piece metal,
contoured



Special plastic
self-spring



Adjustable grip
length, plastic



Key ring



Safety, metal



Mushroom Type
B aviation

Lanyards and
Locating Bushes

Stainless wire -
(coated) -
2 x key ring



Stainless wire -
Key ring and
fixing loop



Plastic -
2 x cable tie



Steel wire -
(coated) -
2 x key ring



Stainless bead
chain -
2 x key ring



Locating
bushes

Actuation



Press = unlock
Release = lock
(standard)



Press = unlock and position
Release = lock and
simultaneous clamp




Simple spring loaded balls
"pullout pin"

Important Note

**Important Note: Ball lock pins are
not suited to lifting applications!**
For quick release lifting pins,
see part 33400.



Shear force



Lifting force

Special Variations




Variations on our standard designs
are possible, please contact our
sales team for technical assistance.
Quick production on specials can
be as little as 3 weeks.



Applications

- Positioning.
- Lifting.
- Locking.
- Indexing.
- Joining.

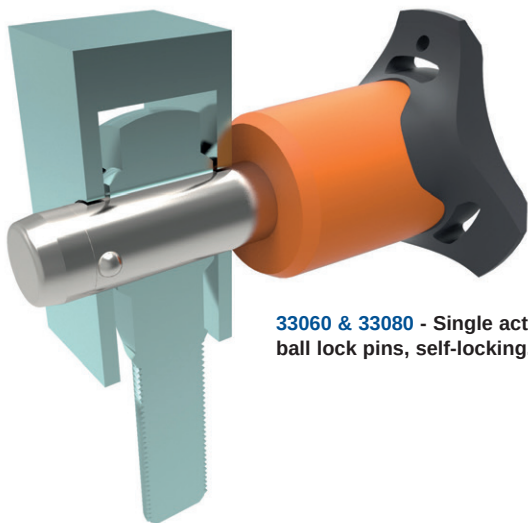

33060 & 33080 - Single acting ball lock pins, self-locking.



33194 - Single acting ball lock pins, self locking, simple finish.




33140 - Socket pins, non-locking, spring loaded balls.



33100 - Single acting ball lock pin, self locking.



33180 - Clamping pins, with span compensation, self-locking.

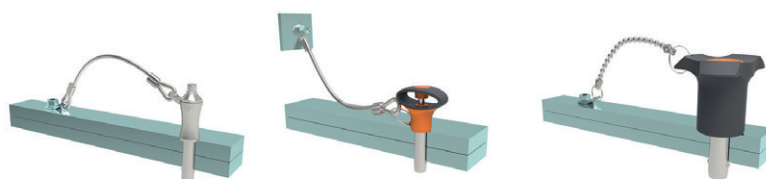

33250 & 33270 - Lanyards.



33220 - Ball lock pins, single acting - L-handle