




# Spring Loaded Pin - Inch - Lever

locking - blackened

## Spring Loaded Pins

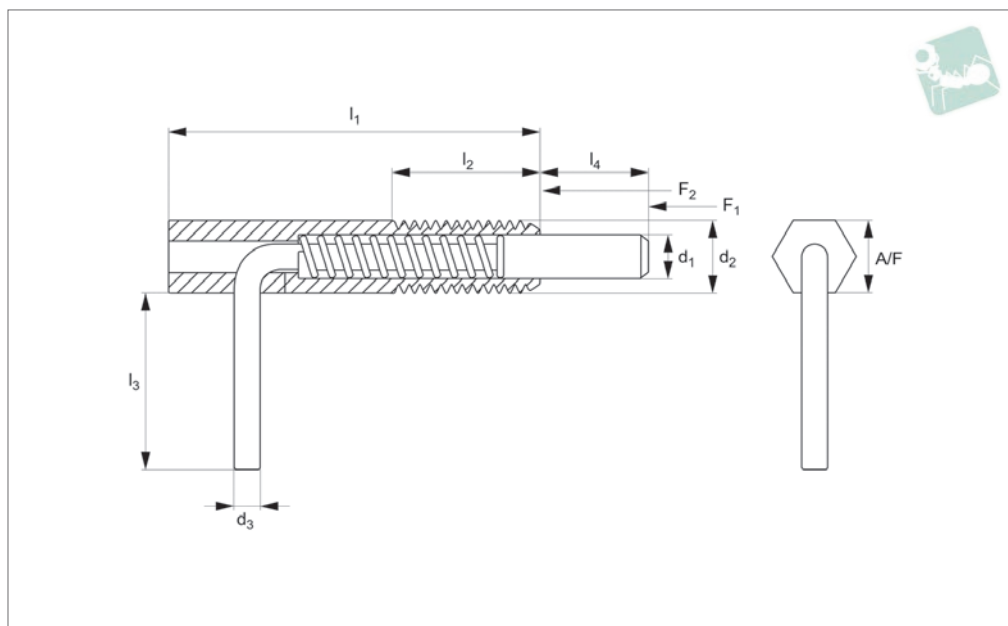

**SL1119**

SPRING LOADED PINS

### Material

Body and pin: steel 12L14, black oxide finish.

enable pin to be held in retracted/ non-projecting position. Pull back lever, turn 90° to engage 'locking'.

### Technical Notes

Spring loaded pin can be „locked“ to

### Tips

For suitable locknut, see part no. SL1816.

| Order No.        | $d_1$<br>+0.000 -0.001 | $d_2$<br>UNC | $l_1$ | $l_2$ | $l_3$ | $l_4$ | $d_3$ | A/F | Spring force $f_1$<br>lb | Spring force $f_2$<br>lb |
|------------------|------------------------|--------------|-------|-------|-------|-------|-------|-----|--------------------------|--------------------------|
| SL1119.I25-038-C | 0.155                  | 1/4-20       | 1.25  | 0.50  | 0.50  | 0.38  | 0.101 | 1/4 | 0.50                     | 2.50                     |
| SL1119.I37-056-C | 0.234                  | 3/8-16       | 2.00  | 1.00  | 0.74  | 0.56  | 0.134 | 3/8 | 0.75                     | 3.75                     |
| SL1119.I50-031-C | 0.313                  | 1/2-13       | 2.11  | 1.11  | 1.00  | 0.75  | 0.188 | 1/2 | 1.00                     | 5.00                     |