




Door Stays

stainless steel - 100° opening

Stays & Hinges

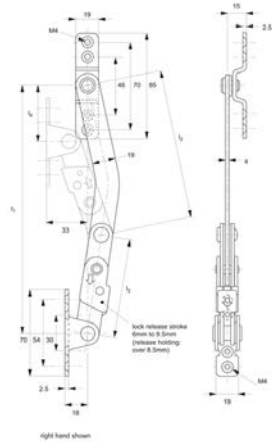

ST0500

Material


Stainless steel, AISI 304, polished.

Technical Notes

Mechanically locks door at fully open posi-

tion. Slide the locking lever to release stay. Lever will remain in unlocked position until the door is returned to fully open position.


Order No.	Type	l_1	a	b	c	d	l_2	l_3	l_4	Weight g
ST0500.M0110	Left	200	121	200	93	36	121	80	45	290
ST0500.M0010	Right	200	121	200	93	36	121	80	45	290
ST0500.M0120	Left	280	161	280	145	40	161	120	44	340
ST0500.M0020	Right	280	161	280	145	40	161	120	44	340

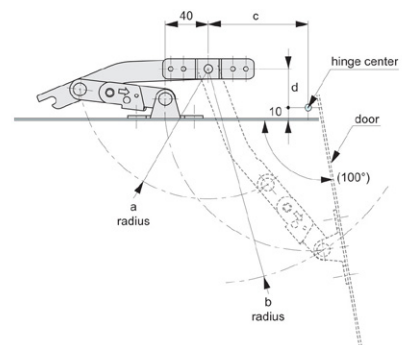




Installation

Installation dimensions

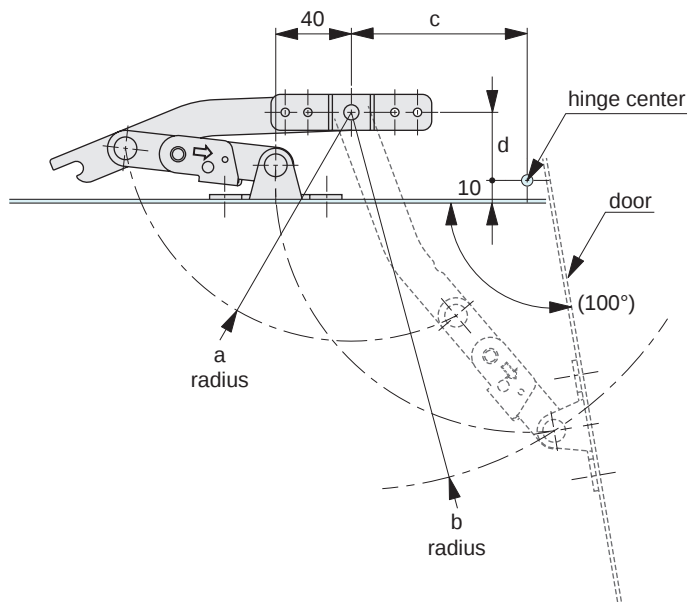

Easy actuation and release

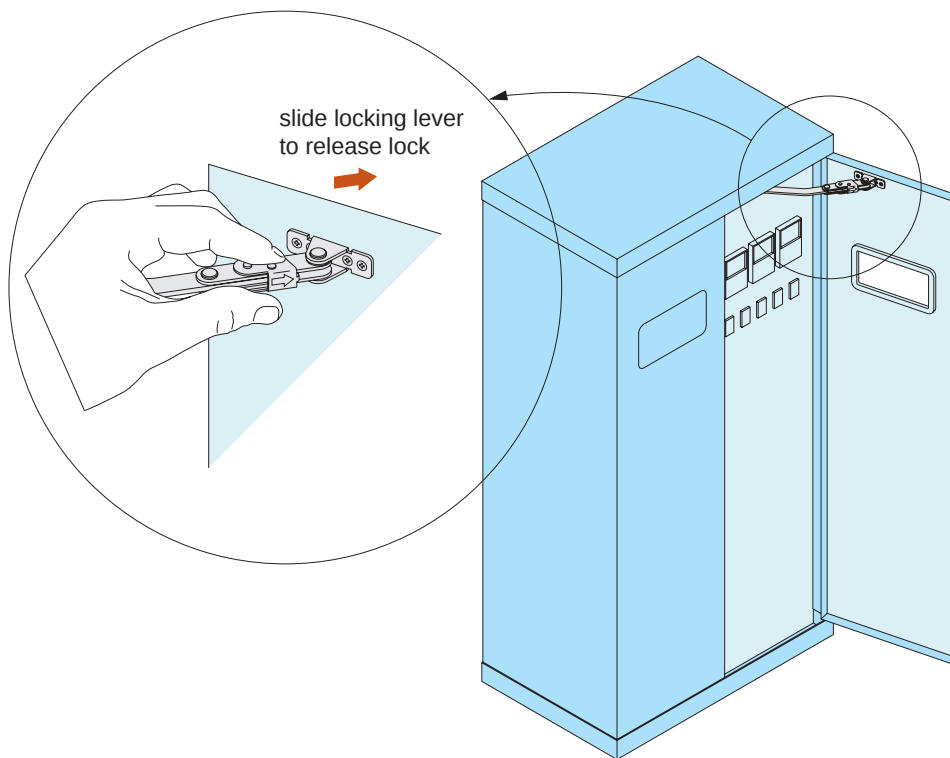



Wixroyd Door Stays


product selection charts

Stays


	Mounting			Door Opening			Material		Heavy Duty	Compression Force Kgf	Max Door Width mm	Tensile Force Kg	Max Angle
	Right	Left	Universal	Muti Stop	Soft Closing	Hold Open	Steel	Stainless Steel					
N2000 			✓	✓				✓			600-910		90°
N2020 	✓	✓			✓			✓		0,6-1,5	300		90°
N2050 			✓			✓	✓			50-60		50-60	100°
N2100 	✓	✓				✓		✓		50-60		150	100°
N2120 			✓			✓			✓	30		60	100°
N2200 	✓	✓				✓		✓	✓	50-60		150	100°




Installation dimensions

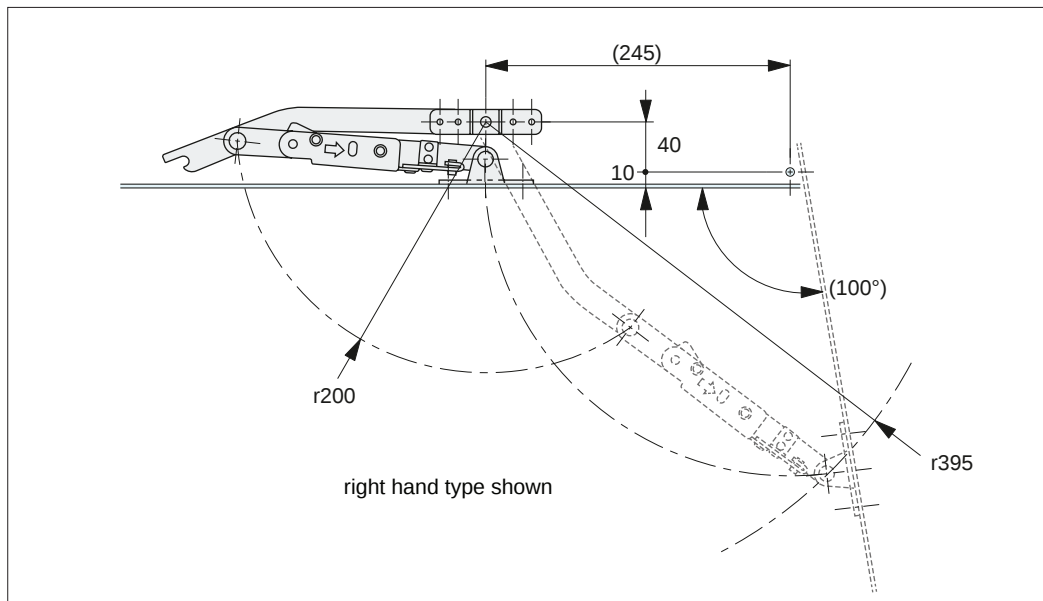

Installation of lock release wire

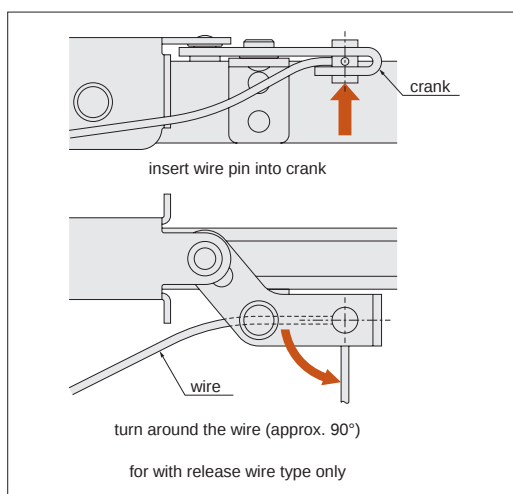

Installation of Lock Release Wire

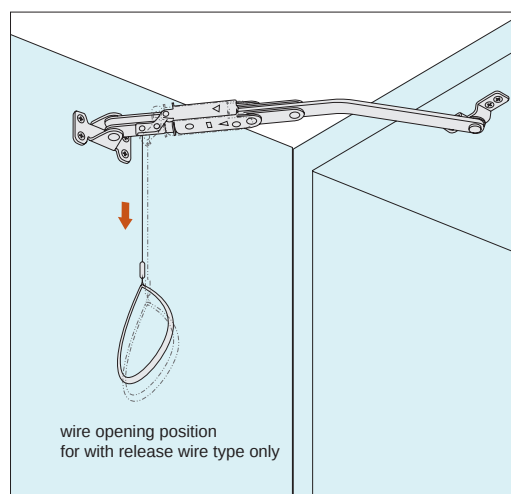


Release of Stay with Release Wire

Stay lock and release



Full Lock Out Indicator

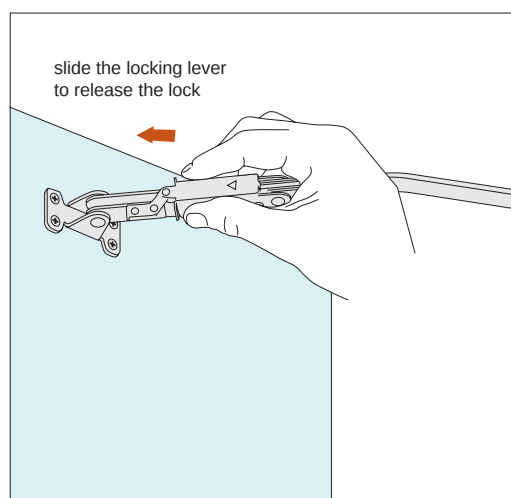

Manual Stay Release