




Captive Screws - Cheese Head

hex drive - 316 stainless

Whilst Stocks
Last ...

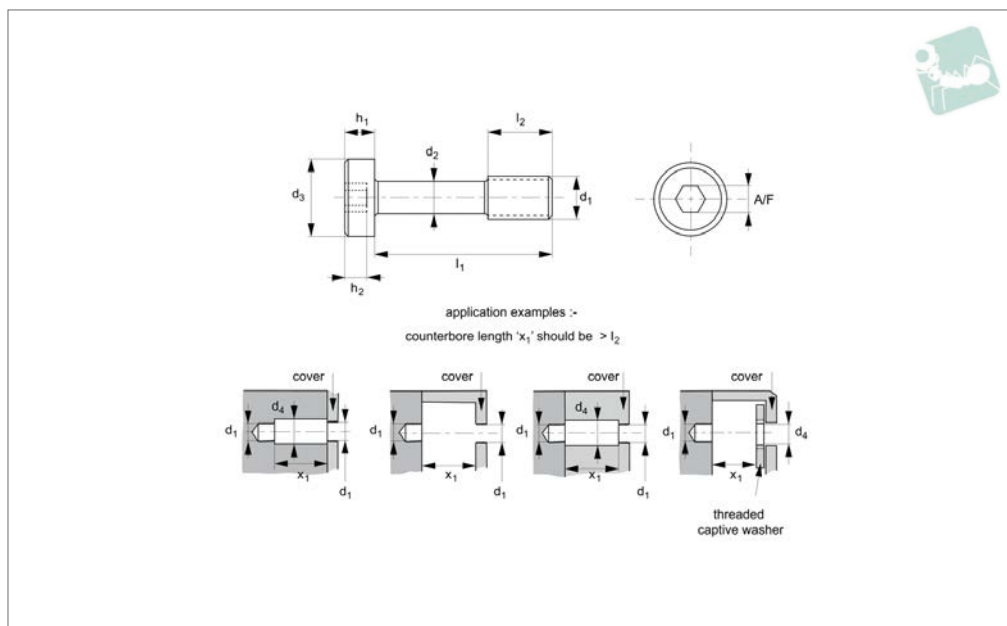

T0152.A4

WHILST STOCKS LAST ...

Material

Stainless steel (AISI 316, 1.4401). This grade of stainless steel is highly resistant to corrosion and is suitable for outdoor, medical and marine applications. Tensile strength 550 N/mm². Also available on request in titanium, steel (anodised, black oxide coated or zinc plated), brass, alumi-

nium etc.

Technical Notes

Used to comply with the Machinery Directive 2006/42/EC. Generally to ISO 1207. Often used with our captive washers (CS1210) or retaining flanges (- for sheet metal applications). The use of our captive

washers should be considered when fitted in panels with unthreaded holes.

Important Notes

Please note that these screws have a reduced diameter shank and should not be tightened to the recommended torque for an equivalent machine screw of size d_1 .

Order No.	d_1	l_1	d_2	d_3	d_4	h_1	h_2	l_2	A/F
T0152.040-050-A4	M 4	± 0.25 50	± 0.12 2.8	7.0	min. 4.5	2.6	1.6	± 0.25 6.0	2.5