




# Captive Screws - Countersunk

## TX drive- 303 stainless

Whilst Stocks  
Last ...

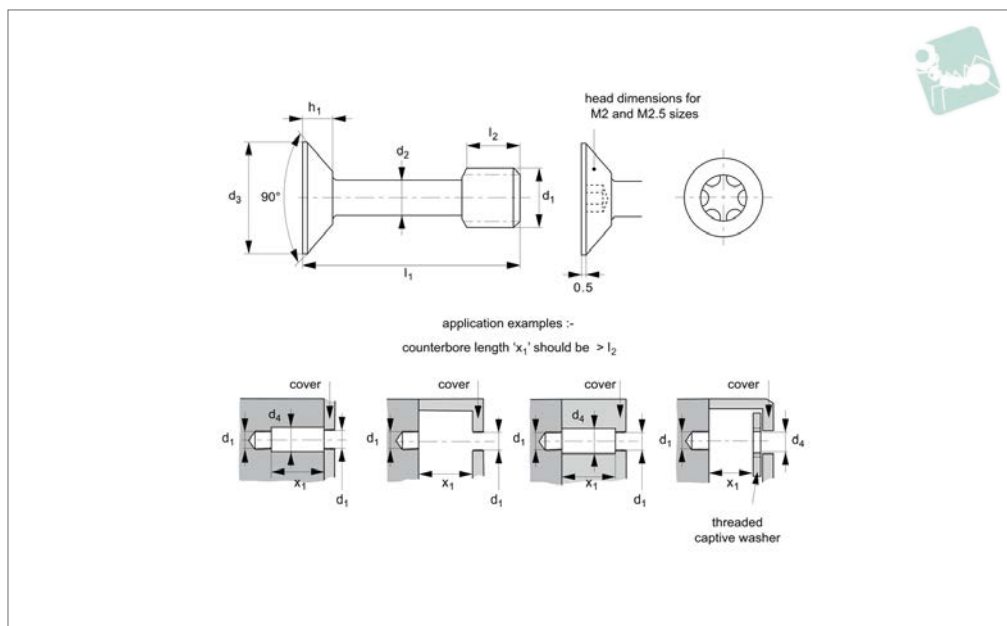

**T0153.TX**

### Material

Stainless steel (AISI 303, 1.4305).  
Tensile strength 550 N/mm<sup>2</sup>.  
Proof stress min. 190 N/mm<sup>2</sup>, austenitic stainless steel.

### Technical Notes

Used to comply with the Machinery Directive 2006/42/EC. Generally to ISO 10642.

Often used with our captive washers (CS1210) or retaining flanges ( - for sheet metal applications). The use of our captive washers should be considered when fitted in panels with unthreaded holes.

### Important Notes

Please note that these screws have a reduced diameter shank and should not be

tightened to the recommended torque for an equivalent machine screw of size  $d_1$ . To accommodate the slight undercut at the top of the shank, the torx drive is smaller than on a similar threaded machine screw.

| Order No.               | $d_1$ | $l_1$<br>$\pm 0.25$ | $d_2$<br>$\pm 0.12$ | $d_3$<br>max. | $d_4$<br>min. | $h_1$<br>max. | $l_2$<br>$\pm 0.25$ | TX size |
|-------------------------|-------|---------------------|---------------------|---------------|---------------|---------------|---------------------|---------|
| <b>T0153.025-025-TX</b> | M 2.5 | 25                  | 1.7                 | 4.7           | 2.8           | 1.80          | 3.7                 | TX-6    |
| <b>T0153.040-018-TX</b> | M 4   | 18                  | 2.8                 | 7.5           | 4.5           | 2.20          | 6.0                 | TX-10   |
| <b>T0153.040-030-TX</b> | M 4   | 30                  | 2.8                 | 7.5           | 4.5           | 2.20          | 6.0                 | TX-10   |
| <b>T0153.050-025-TX</b> | M 5   | 25                  | 3.7                 | 9.2           | 5.5           | 2.50          | 7.5                 | TX-20   |