




Captive Screws - Cap Head

hex drive - 316 stainless

Whilst Stocks
Last ...

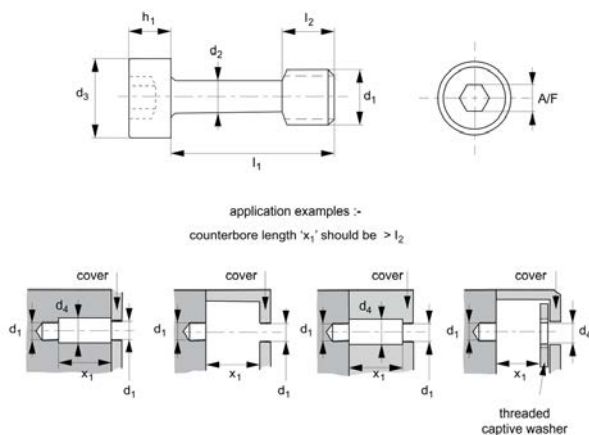

T0154.A4

WHILST STOCKS LAST ...

Material

Stainless steel (AISI 316, 1.440).
Tensile strength 480 N/mm². Proof stress min. 200 N/mm², austenitic stainless steel.
Also available on request in steel (anodised, black oxide or zinc plated), stainless steel (AISI 303, 1.4305), brass, aluminium etc.

tive 2006/42/EC. Generally to ISO 4762.
Often used with our captive washers () or retaining flanges (- for sheet metal applications). The use of our captive washers () should be considered when fitted in panels with unthreaded holes.

Tips

For TX drive style, see .

Important Notes

Please note that these screws have a reduced diameter shank and should not be tightened to the recommended torque for an equivalent machine screw of size d₁.

Technical Notes

Used to comply with the Machinery Direc-

Order No.	d ₁	l ₁ ±0.25	d ₂ ±0.12	d ₃ max.	d ₄ min.	h ₁ max.	l ₂ ±0.25	A/F
T0154.080-035-A4	M 8	35	6.0	13.0	8.5	8.0	10.0	6
T0154.080-040-A4	M 8	40	6.0	13.0	8.5	8.0	10.0	6