




Captive Screws - Cap Head

hex drive - steel, blackened

Whilst Stocks
Last ...

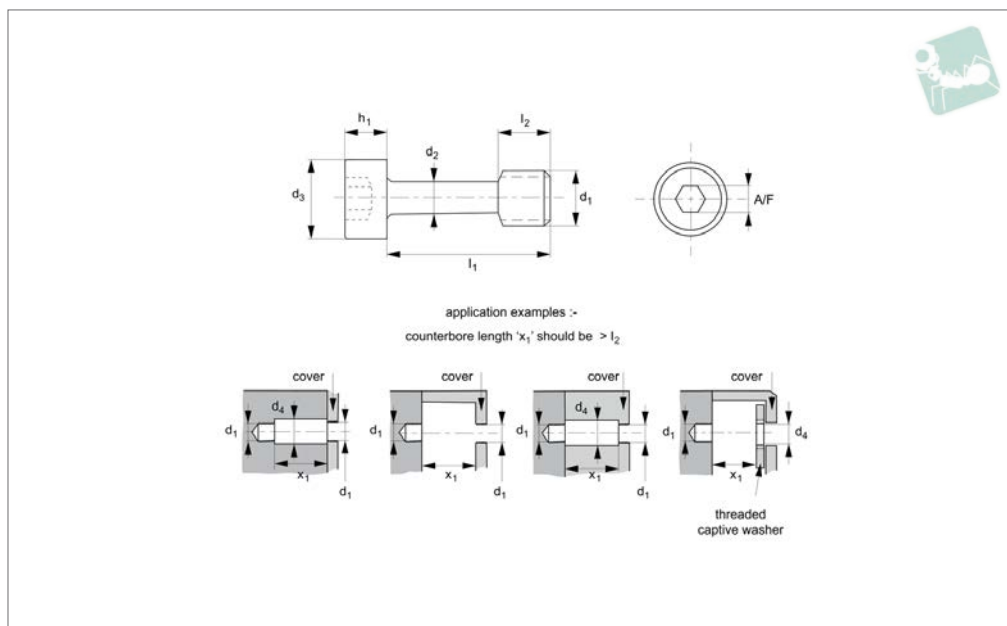

T0154.BL

WHILST STOCKS LAST ...

Material

Steel blackened.
Tensile strength 550 N/mm².
Also available on request in steel (anodised or zinc plated), stainless steel (AISI 316, 1.440 or AISI 303, 1.4305), brass, aluminium etc.

Technical Notes

Used to comply with the Machinery Direc-

tive 2006/42/EC. Generally to ISO 4762.
Often used with our captive washers () or retaining flanges (- for sheet metal applications). The use of our captive washers should be considered when fitted in panels with unthreaded holes.

Tips

For TX drive style, see .

Important Notes

Please note that these screws have a reduced diameter shank and should not be tightened to the recommended torque for an equivalent machine screw of size d₁.

Order No.	d ₁	l ₁ ±0.25	d ₂ ±0.12	l ₂ ±0.25	d ₃ max.	d ₄ min.	h ₁ max.	A/F
T0154.080-020-BL	M 8	20	6.0	10.0	13.0	8.5	8.0	6
T0154.080-030-BL	M 8	30	6.0	10.0	13.0	8.5	8.0	6
T0154.080-035-BL	M 8	35	6.0	10.0	13.0	8.5	8.0	6