




# Captive Thumb Screws

316 stainless

Whilst Stocks  
Last ...

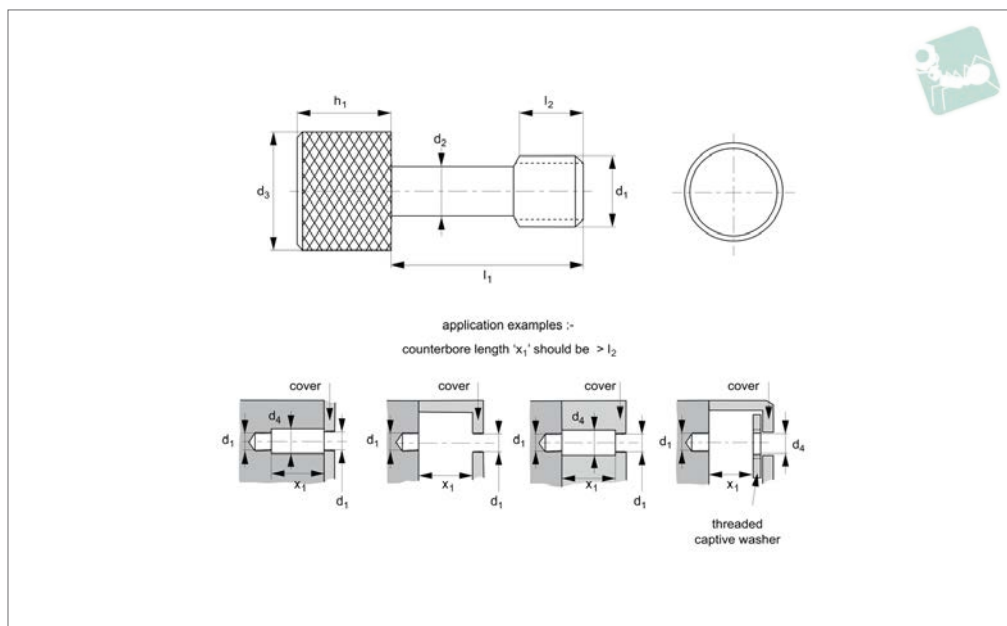

**T0161.A4**

WHILST STOCKS LAST ...

## Material

Stainless steel (AISI 316, 1.440).  
Tensile strength 480 N/mm<sup>2</sup>. Proof stress  
min. 200 N/mm<sup>2</sup>, austenitic stainless steel.  
Also available on request in steel  
(anodised, black oxide or zinc plated),  
stainless steel (AISI 303, 1.4305), brass,  
aluminium etc.

## Technical Notes

Used to comply with the Machinery Direc-  
tive 2006/42/EC. Often used with our  
captive washer (CS1210) or retaining  
flanges ( - for sheet metal applications).  
The use of our captive washer should be  
considered when fitted in panels with  
unthreaded holes.

## Important Notes

Please note that these screws have a  
reduced diameter shank and should not be  
tightened to the recommended torque for  
an equivalent machine screw of size d<sub>1</sub>.

| Order No.               | d <sub>1</sub> | d <sub>2</sub> | l <sub>1</sub> | l <sub>2</sub> | d <sub>3</sub> | d <sub>4</sub><br>min. | h <sub>1</sub> |
|-------------------------|----------------|----------------|----------------|----------------|----------------|------------------------|----------------|
| <b>T0161.040-010-A4</b> | M 4            | ±0.12<br>2.8   | ±0.25<br>10    | ±0.25<br>6.0   | 10             | 4.5                    | 5              |
| <b>T0161.040-012-A4</b> | M 4            | 2.8            | 12             | 6.0            | 10             | 4.5                    | 5              |