




# Captive Thumb Screws

303 stainless, blackened

Whilst Stocks  
Last ...

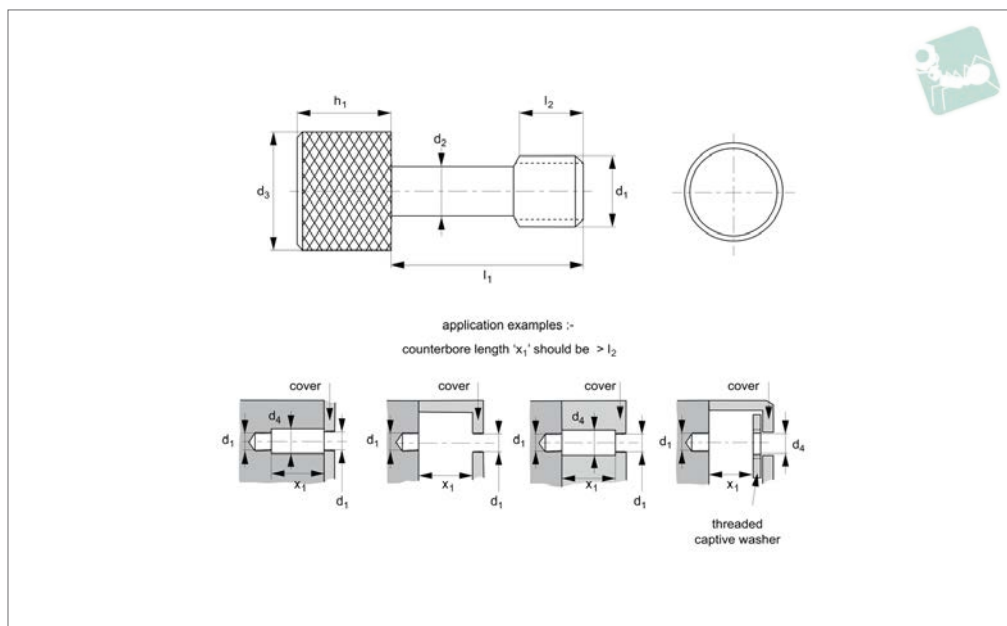

**T0161.B2**

WHILST STOCKS LAST ...

## Material

Stainless steel (AISI 303, 1.4305), black oxide coating. Tensile strength 550 N/mm<sup>2</sup>. Proof stress min. 190 N/mm<sup>2</sup>, austenitic stainless steel.

Also available on request in steel (anodised, black oxide or zinc plated) stainless steel (AISI 316, 1.440), brass,

aluminium etc.

## Technical Notes

Used to comply with the Machinery Directive 2006/42/EC. Often used with our captive washer (CS1210) or retaining flanges ( - for sheet metal applications). The use of our captive washer should be

considered when fitted in panels with unthreaded holes.

## Important Notes

Please note that these screws have a reduced diameter shank and should not be tightened to the recommended torque for an equivalent machine screw of size d<sub>1</sub>.

| Order No.               | d <sub>1</sub> | d <sub>2</sub> | l <sub>1</sub> | l <sub>2</sub> | d <sub>3</sub> | d <sub>4</sub><br>min. | h <sub>1</sub> |
|-------------------------|----------------|----------------|----------------|----------------|----------------|------------------------|----------------|
| <b>T0161.030-008-B2</b> | M 3            | ±0.12<br>2.0   | ±0.25<br>8     | ±0.25<br>4.5   | 8              | 3.5                    | 5              |
| <b>T0161.080-035-B2</b> | M 8            | 6.0            | 35             | 10.0           | 16             | 8.5                    | 8              |