




Extra Low Head Cap Screws

hex. drive - 303 stainless

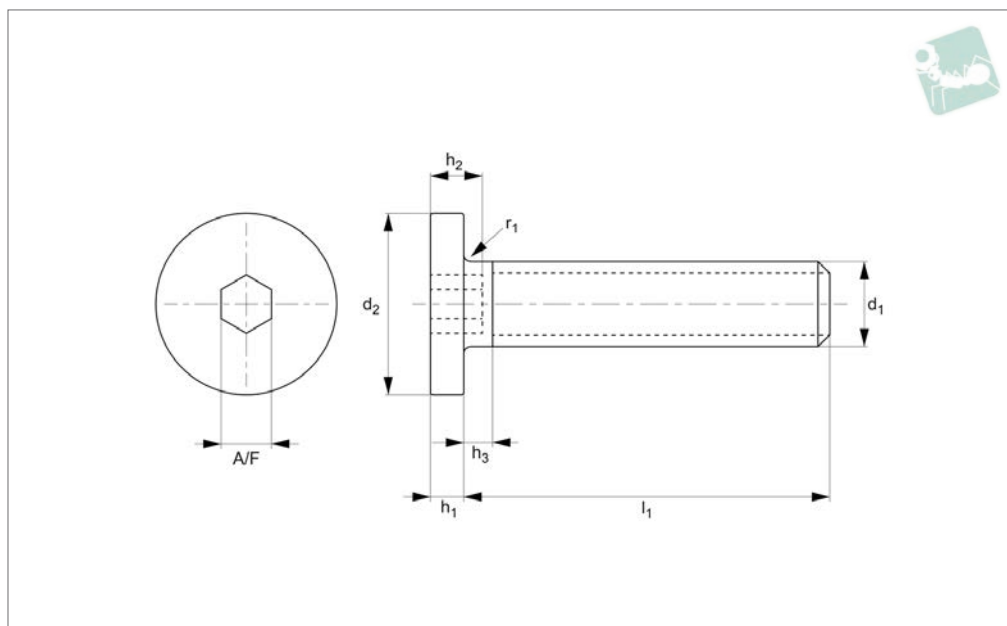

T0207.A2

STAINLESS STEEL

Material

Stainless steel (AISI 303, 1.4305).
Tensile strength ~ 400N/mm²

(except for M2 ~ 220N/mm²).

Technical Notes

Extra low head cap screws reduce the screw

head height space. They require no countersinking unlike flat head screws.

Order No.	d ₁	l ₁	d ₂	h ₁	h ₂ max.	h ₃ max.	r ₁	A/F	Torque to Nm max.
T0207.020-003-A2	M 2	3	4	1.5	1.2	1.2	0.10	1.3	0.16
T0207.020-004-A2	M 2	4	4	1.5	1.2	1.2	0.10	1.3	0.16
T0207.020-005-A2	M 2	5	4	1.5	1.2	1.2	0.10	1.3	0.16
T0207.020-006-A2	M 2	6	4	1.5	1.2	1.2	0.10	1.3	0.16
T0207.020-008-A2	M 2	8	4	1.5	1.2	1.2	0.10	1.3	0.16
T0207.020-010-A2	M 2	10	4	1.5	1.2	1.2	0.10	1.3	0.16
T0207.020-012-A2	M 2	12	4	1.5	1.2	1.2	0.10	1.3	0.16
T0207.025-003-A2	M 2.5	3	5	1.5	1.5	1.5	0.10	1.3	0.35
T0207.025-004-A2	M 2.5	4	5	1.5	1.5	1.5	0.10	1.3	0.35
T0207.025-005-A2	M 2.5	5	5	1.5	1.5	1.5	0.10	1.3	0.35
T0207.025-006-A2	M 2.5	6	5	1.5	1.5	1.5	0.10	1.3	0.35
T0207.025-008-A2	M 2.5	8	5	1.5	1.5	1.5	0.10	1.3	0.35
T0207.025-010-A2	M 2.5	10	5	1.5	1.5	1.5	0.10	1.3	0.35
T0207.025-012-A2	M 2.5	12	5	1.5	1.5	1.5	0.10	1.3	0.35
T0207.030-004-A2	M 3	4	6	1.5	2.0	1.6	0.10	1.5	0.60
T0207.030-005-A2	M 3	5	6	1.5	2.0	1.6	0.10	1.5	0.60
T0207.030-006-A2	M 3	6	6	1.5	2.0	1.6	0.10	1.5	0.60
T0207.030-008-A2	M 3	8	6	1.5	2.0	1.6	0.10	1.5	0.60
T0207.030-010-A2	M 3	10	6	1.5	2.0	1.6	0.10	1.5	0.60
T0207.030-012-A2	M 3	12	6	1.5	2.0	1.6	0.10	1.5	0.60
T0207.030-014-A2	M 3	14	6	1.5	2.0	1.6	0.10	1.5	0.60
T0207.030-016-A2	M 3	16	6	1.5	2.0	1.6	0.10	1.5	0.60
T0207.040-005-A2	M 4	5	8	1.5	2.5	1.6	0.20	2.0	1.10
T0207.040-006-A2	M 4	6	8	1.5	2.5	1.6	0.20	2.0	1.10
T0207.040-008-A2	M 4	8	8	1.5	2.5	1.6	0.20	2.0	1.10
T0207.040-010-A2	M 4	10	8	1.5	2.5	1.6	0.20	2.0	1.10
T0207.040-012-A2	M 4	12	8	1.5	2.5	1.6	0.20	2.0	1.10
T0207.040-014-A2	M 4	14	8	1.5	2.5	1.6	0.20	2.0	1.10
T0207.040-016-A2	M 4	16	8	1.5	2.5	1.6	0.20	2.0	1.10
T0207.040-018-A2	M 4	18	8	1.5	2.5	1.6	0.20	2.0	1.10
T0207.040-020-A2	M 4	20	8	1.5	2.5	1.6	0.20	2.0	1.10
T0207.050-006-A2	M 5	6	9	1.5	3.0	2.0	0.20	3.0	2.20
T0207.050-008-A2	M 5	8	9	1.5	3.0	2.0	0.20	3.0	2.20
T0207.050-010-A2	M 5	10	9	1.5	3.0	2.0	0.20	3.0	2.20



Teknipart
AN ESSENTIA COMPANY

0333 207 9969

sales@teknipart.co.uk



Order No.	d ₁	l ₁	d ₂	h ₁	h ₂ max.	h ₃ max.	r ₁	A/F	Torque to Nm max.
T0207.050-012-A2	M 5	12	9	1.5	3.0	2.0	0.20	3.0	2.20
T0207.050-014-A2	M 5	14	9	1.5	3.0	2.0	0.20	3.0	2.20
T0207.050-016-A2	M 5	16	9	1.5	3.0	2.0	0.20	3.0	2.20
T0207.050-018-A2	M 5	18	9	1.5	3.0	2.0	0.20	3.0	2.20
T0207.050-020-A2	M 5	20	9	1.5	3.0	2.0	0.20	3.0	2.20
T0207.050-025-A2	M 5	25	9	1.5	3.0	2.0	0.20	3.0	2.20
T0207.060-006-A2	M 6	6	10	1.5	4.0	2.5	0.25	3.0	5.00
T0207.060-008-A2	M 6	8	10	1.5	4.0	2.5	0.25	3.0	5.00
T0207.060-010-A2	M 6	10	10	1.5	4.0	2.5	0.25	3.0	5.00
T0207.060-012-A2	M 6	12	10	1.5	4.0	2.5	0.25	3.0	5.00
T0207.060-014-A2	M 6	14	10	1.5	4.0	2.5	0.25	3.0	5.00
T0207.060-016-A2	M 6	16	10	1.5	4.0	2.5	0.25	3.0	5.00
T0207.060-018-A2	M 6	18	10	1.5	4.0	2.5	0.25	3.0	5.00
T0207.060-020-A2	M 6	20	10	1.5	4.0	2.5	0.25	3.0	5.00
T0207.060-025-A2	M 6	25	10	1.5	4.0	2.5	0.25	3.0	5.00
T0207.060-030-A2	M 6	30	10	1.5	4.0	2.5	0.25	3.0	5.00
T0207.080-006-A2	M 8	6	13	1.5	5.0	3.0	0.40	4.0	10.10
T0207.080-008-A2	M 8	8	13	1.5	5.0	3.0	0.40	4.0	10.10
T0207.080-010-A2	M 8	10	13	1.5	5.0	3.0	0.40	4.0	10.10
T0207.080-012-A2	M 8	12	13	1.5	5.0	3.0	0.40	4.0	10.10
T0207.080-014-A2	M 8	14	13	1.5	5.0	3.0	0.40	4.0	10.10
T0207.080-016-A2	M 8	16	13	1.5	5.0	3.0	0.40	4.0	10.10
T0207.080-018-A2	M 8	18	13	1.5	5.0	3.0	0.40	4.0	10.10
T0207.080-020-A2	M 8	20	13	1.5	5.0	3.0	0.40	4.0	10.10
T0207.080-025-A2	M 8	25	13	1.5	5.0	3.0	0.40	4.0	10.10
T0207.080-030-A2	M 8	30	13	1.5	5.0	3.0	0.40	4.0	10.10
T0207.100-010-A2	M 10	10	16	1.5	6.0	3.5	0.40	5.0	17.50
T0207.100-012-A2	M 10	12	16	1.5	6.0	3.5	0.40	5.0	17.50
T0207.100-014-A2	M 10	14	16	1.5	6.0	3.5	0.40	5.0	17.50
T0207.100-016-A2	M 10	16	16	1.5	6.0	3.5	0.40	5.0	17.50
T0207.100-018-A2	M 10	18	16	1.5	6.0	3.5	0.40	5.0	17.50
T0207.100-020-A2	M 10	20	16	1.5	6.0	3.5	0.40	5.0	17.50
T0207.100-025-A2	M 10	25	16	1.5	6.0	3.5	0.40	5.0	17.50
T0207.100-030-A2	M 10	30	16	1.5	6.0	3.5	0.40	5.0	17.50