




Ultra Low Head Cap Screws

TX drive - 316 stainless

Stainless Steel

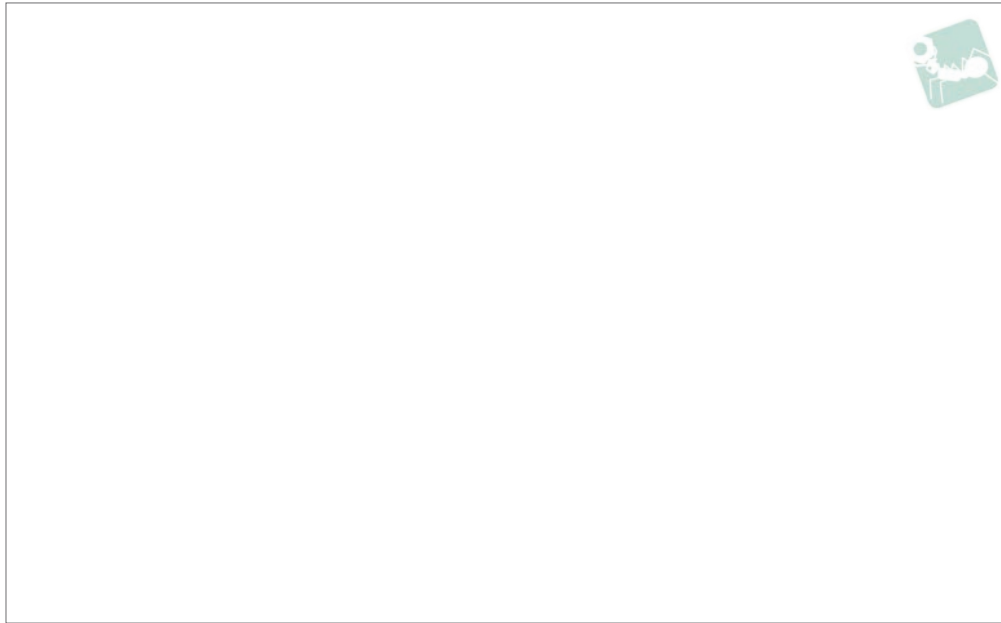

T0209.A4

STAINLESS STEEL

Material

Stainless steel (AISI 303, 1.4305).
Tensile strength ~ 350N/mm²
(except for M2 ~ 200Nmm²).

Technical Notes

Ultra low head is extremely low profile.
They do not require a countersunk location
hole.

Most suitable for machine and equipment
applications with minimal clearance.

Order No.	d ₁	l ₁	d ₂	h ₁	h ₂ max.	r ₁ max.	TX size	Torque to Nm max.
T0209.020-003-A4	M 2	3	4	0.5	1.5	0.3	TX-4	0.18
T0209.020-004-A4	M 2	4	4	0.5	1.5	0.3	TX-4	0.18
T0209.020-005-A4	M 2	5	4	0.5	1.5	0.3	TX-4	0.18
T0209.020-006-A4	M 2	6	4	0.5	1.5	0.3	TX-4	0.18
T0209.020-008-A4	M 2	8	4	0.5	1.5	0.3	TX-4	0.18
T0209.020-010-A4	M 2	10	4	0.5	1.5	0.3	TX-4	0.18
T0209.025-003-A4	M 2.5	3	6	0.6	1.6	0.3	TX-5	0.36
T0209.025-004-A4	M 2.5	4	6	0.6	1.6	0.3	TX-5	0.36
T0209.025-005-A4	M 2.5	5	6	0.6	1.6	0.3	TX-5	0.36
T0209.025-006-A4	M 2.5	6	6	0.6	1.6	0.3	TX-5	0.36
T0209.030-005-A4	M 3	5	7	0.8	2.0	0.4	TX-6	0.63
T0209.030-006-A4	M 3	6	7	0.8	2.0	0.4	TX-6	0.63
T0209.030-008-A4	M 3	8	7	0.8	2.0	0.4	TX-6	0.63
T0209.030-010-A4	M 3	10	7	0.8	2.0	0.4	TX-6	0.63
T0209.030-012-A4	M 3	12	7	0.8	2.0	0.4	TX-6	0.63
T0209.030-016-A4	M 3	16	7	0.8	2.0	0.4	TX-6	0.63
T0209.040-006-A4	M 4	6	8	0.9	2.5	0.5	TX-8	1.50
T0209.040-008-A4	M 4	8	8	0.9	2.5	0.5	TX-8	1.50
T0209.040-010-A4	M 4	10	8	0.9	2.5	0.5	TX-8	1.50
T0209.040-012-A4	M 4	12	8	0.9	2.5	0.5	TX-8	1.50
T0209.040-016-A4	M 4	16	8	0.9	2.5	0.5	TX-8	1.50
T0209.040-020-A4	M 4	20	8	0.9	2.5	0.5	TX-8	1.50
T0209.040-025-A4	M 4	25	8	0.9	2.5	0.5	TX-8	1.50
T0209.050-008-A4	M 5	8	9	1.0	3.0	0.6	TX-10	3.00
T0209.050-010-A4	M 5	10	9	1.0	3.0	0.6	TX-10	3.00
T0209.050-012-A4	M 5	12	9	1.0	3.0	0.6	TX-10	3.00
T0209.050-016-A4	M 5	16	9	1.0	3.0	0.6	TX-10	3.00
T0209.050-020-A4	M 5	20	9	1.0	3.0	0.6	TX-10	3.00
T0209.050-025-A4	M 5	25	9	1.0	3.0	0.6	TX-10	3.00
T0209.060-008-A4	M 6	8	12	1.2	3.5	0.7	TX-20	5.20
T0209.060-010-A4	M 6	10	12	1.2	3.5	0.7	TX-20	5.20
T0209.060-012-A4	M 6	12	12	1.2	3.5	0.7	TX-20	5.20
T0209.060-016-A4	M 6	16	12	1.2	3.5	0.7	TX-20	5.20



Order No.	d ₁	l ₁	d ₂	h ₁	h ₂ max.	r ₁ max.	TX size	Torque to Nm max.
T0209.060-020-A4	M 6	20	12	1.2	3.5	0.7	TX-20	5.20
T0209.060-025-A4	M 6	25	12	1.2	3.5	0.7	TX-20	5.20

STAINLESS STEEL